



SPECIFICATION
 ELECTRICAL
 Current rating(40°C): 4A
 Voltage rating: 250V AC/DC
 Temperature range: -25°C TO +85°C

ITEM	PART	DESCRIPTION
1	Connector	M12 D-Code 4pin Male Cable end RJ45 8P8C Connector
2	Contact	M12 Conn.:BRASS(C3604-EH) Over 50u" Nickel min. Gold Flash RJ45:Phosphor Bronze(C5191), Gold 50u"
3	Male Front Metal Body	BRASS(C3604-EH) 50u" Nickel min.
4	Male Middle Holder	BRASS(C3604-EH) 50u" Nickel min.
5	Plastic Body	M12 Conn.:PA66(6401G6) GF30% ,rated UL94V-0 RJ45:Polycarbonate,rated UL 94V-0
6	Crimp O-Ring	Silicon rubber 60°
7	Rubber Boot	M12 Conn.:Silicon rubber 70° RJ45:PVC
8	Epoxy	NAEFUMI0 7391-38 A:B=3:1
9	Cable	S/FTP Cat.6a 26AWG 4 twisted pair ,Jacket:TPU Green, OD6.2

WIRING DIAGRAM(26AWG)

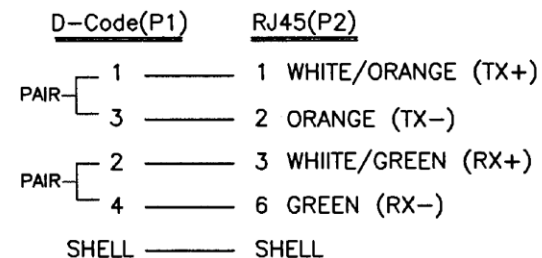

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 2°

P PROJECTION

照片框

ORDER INFORMATION

M12RJ-04D0826C6A-Mxxx-LF

SERIES

LEADFREE

1M:1000mm
 2M:2000mm
 3M:3000mm

MALE TO MALE

04P D CODE TO 8P8C

CAT.6A
 26 AWG

DESCRIPTION: