


TITLE: M12-4PIN FEMALE TO USB A TYPE MALE

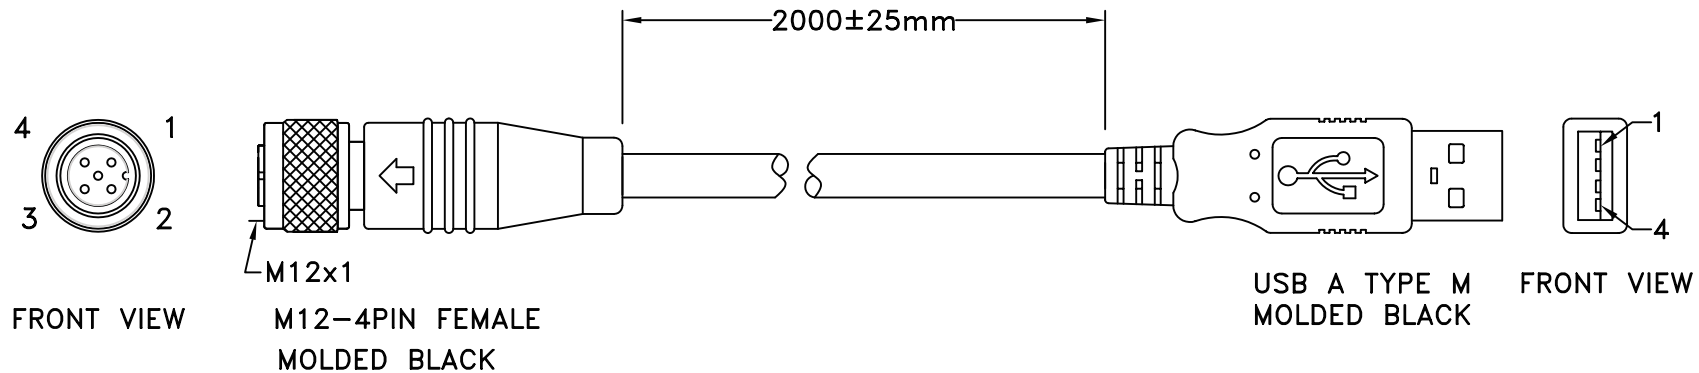

***CONSTRUCTION:

1.CABLE: * UL2725(1PR/28#)+(2C/24#)+AEB65% OD:4.7mm BLACK COLOR.

***CONNECTORS:

2.M12-4PIN: * M12-4PIN FEMALE SOLDER TYPE.
* PIN: BRASS WITH GOLD FLASH.
* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
* GASKET: SILICONE RUBBER BLACK COLOR.
* FERRULE: BRASS WITH NICKEL PLATED.
* MOLDED: PVC 45P BLACK COLOR.

3.USB A/M: OLDER TYPE.
* PINS: BRASS WITH 30u GO

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.

PIN OUT

M12-4P/F		USB A/M
1	RED 24#	1
2	WHITE 28#	2
3	GREEN 28#	3
4	BLACK 24#	4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12UB-044A2428-A2M-LF

SERIES

LEADFREE

2000mm

FEMALE TO MALE

24&28 AWG

MINI DIN 4PIN TO 4 PIN A TYPE

DESCRIPTION: