
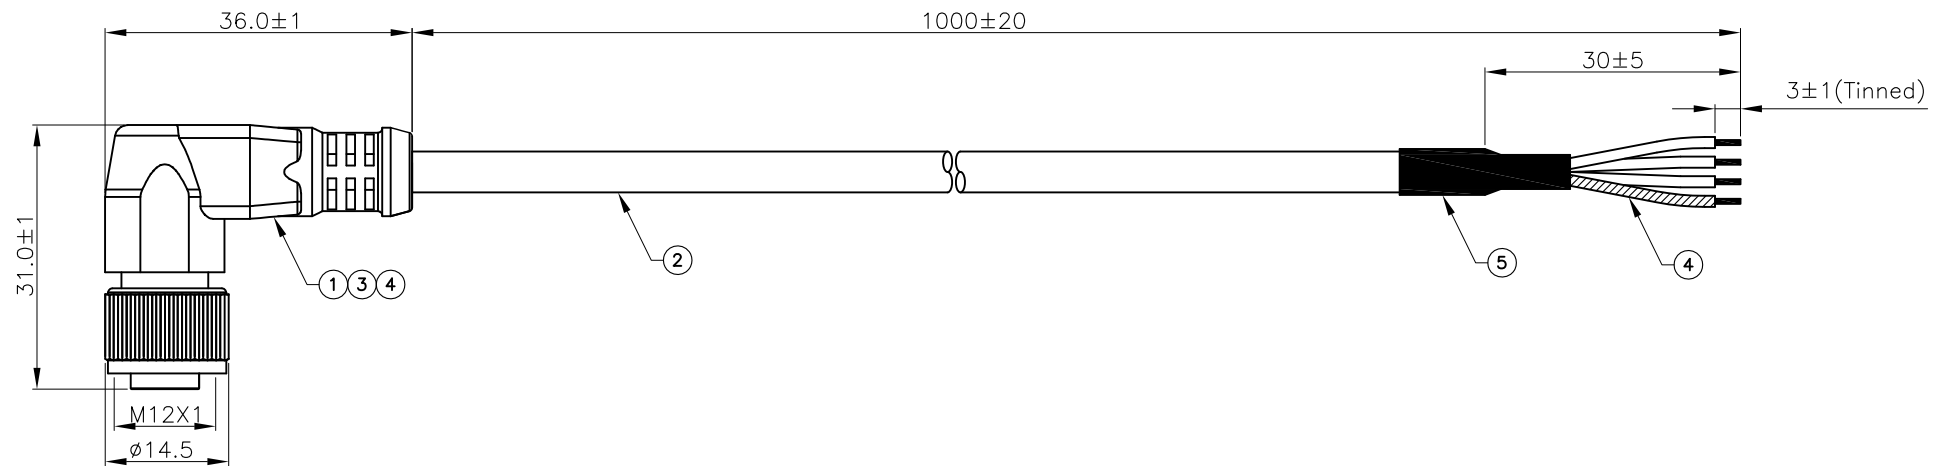


P1

PIN OUT:

P1		
1	Black	Tin
3	Red	Tin
4	Yellow	Tin
Shell	Braid	Tin



P1

Pin Assignments Front View

ITEM	DESCRIPTION	Q'TY
1	M12 Socket A Coded Solder for Overmolded With Shielding	1
2	UL2464 22AWG*3C+AB PVC Jacket OD:4.9 Color:Black 80°C 300V	A/R
3	PVC Outer molding Color:Black	A/R
4	Heat Shrink Tube OD:1.0 Color:Black	A/R
5	Heat Shrink Tube OD:5.0 L=20mm Color:Black	A/R

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M12X1-03R0022BK-F1M-LF

SERIES

3 PIN 90°

22AWG

BLACK

FEMALE

1000mm

LEADFREE

DESCRIPTION: M12 SOCKET CABLE ASSEMBLY RIGHT ANGLE