


M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)

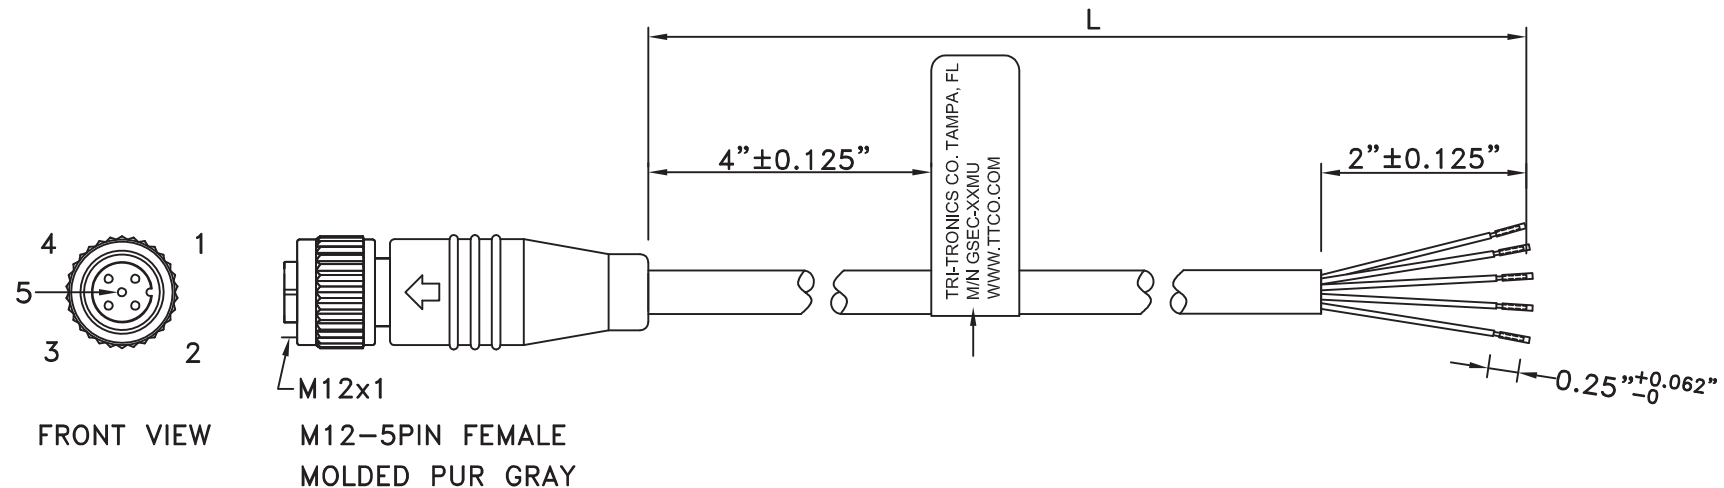

PIN OUT M12-5PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC
5	GRAY	NC

L=2M/5M/10M METER

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

PPOJECTION

照片框

ORDER INFORMATION

M12X1-050022GE-Fxxx-LF

SERIES

05 WAY

22 AWG

GRAY

LEADFREE
2M:2 METER
5M:5 METER
10M:10 METER

FEMALE

DESCRIPTION:

M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)

***CONSTRUCTION:

1.CABLE: * UL2464 (5C/22#)+TISSUE PAPER OD:5.2mm GRAY PVC JACKET.

***CONNECTORS:

- 2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.
* PIN: BRASS WITH GOLD PLATED.
* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
* O-RING: SILICONE RUBBER RED COLOR.
* MOLDED: PUR GRAY COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GSEC-XXMU WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 4A VOLTAGE RATING: 250V
- 6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X1-050022GE-Fxxx-LF

SERIES

05 WAY

22 AWG

GRAY

LEADFREE

2M:2 METER
5M:5 METER
10M:10 METER

FEMALE

DESCRIPTION: