

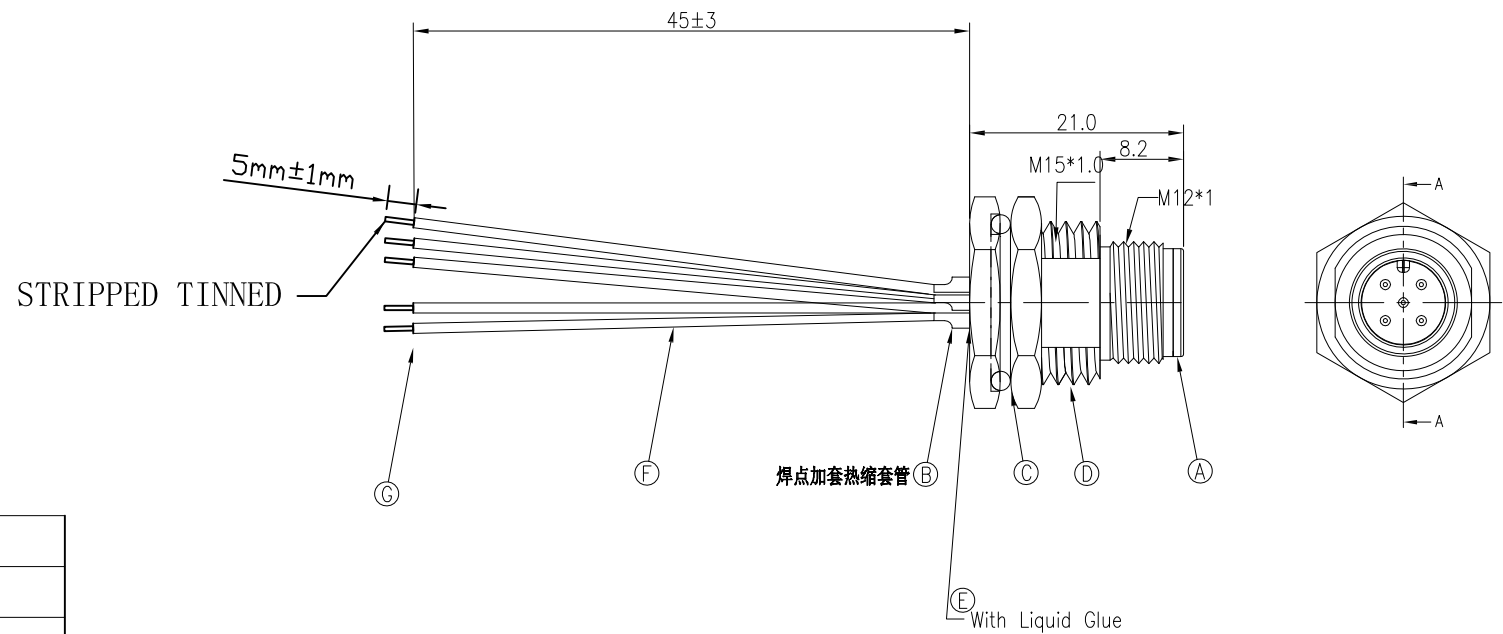


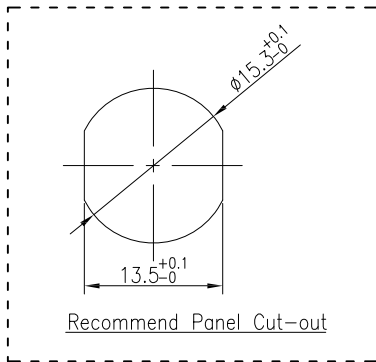

①	Brown
②	Black
③	Blue
④	White
⑤	Grey
CABLE 颜色	



G	HOUSING/PIN	1	/	WHITE
F	CABLE	1	UL1007 22AWG	N/A
E	LIQUID GLUE	1	/	BLACK
D	SHIELD	1	BRASS	NICKEL PLATING
C	O-RING	1	EPDM	BLACK
B	MALE PIN	4	BRASS	GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

NOTES:

- WATERPROOF RATE: IP68
IP68: IMMERSED IN 1M WATER FOR 24 HOURS
- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
RATING: 60V AC/DC 5A(5pin) 2A(8pin)
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- FOR PANEL THICKNESS MAX OF 4.0mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M12X1-050022W1PBON15-M5C-LF

SERIES 05 WAY 22AWG WIRE
MALE
15.3 DIA
O-RING+NUT
PANEL BACK
LEADFREE
50mm

DESCRIPTION: M12 PANEL (IP68) M CONN+ M CONN SCREW TYPE