



M12-5PIN FEMALE RIGHT-ANGLE TO OPEN (YELLOW PVC JACKET)

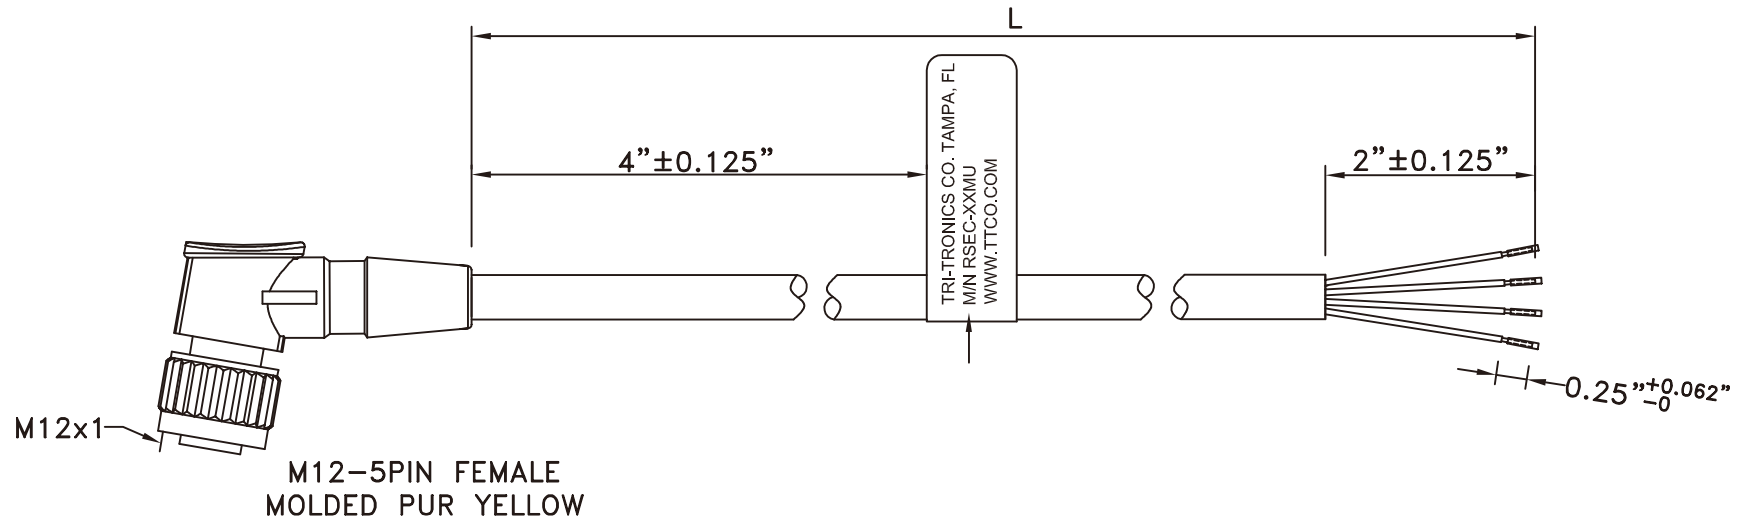

FRONT VIEW

M12-5PIN FEMALE  
MOLDED PUR YELLOW

M12-5PIN FEMALE

PIN OUT	
1	BROWN NC
2	WHITE NC
3	BLUE NC
4	BLACK NC
5	NC

M12X1-05A0422YL-Fxxx-LF

- 2M:2 METER
- 5M:5 METER
- 10M:10 METER

LEADFREE

RoHS Compliant

L=2M/5M/10M METER

	PART NO. M12X1-05A0422YL-Fxxx		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:
	DWG NO. M12X1-05A0422YL-Fxxx	CHECKED BY CY		
焯倫股份有限公司	FILE NO.		DRAWING BY	AREA      REVISIONS      HK      DATE
	UNIT / mm	SCALE 1:1	PROJECTION	


M12-5PIN FEMALE TO OPEN (YELLOW PVC JACKET)

\*\*\*CONSTRUCTION:

1.CABLE: \* UL2464 (4C/22#)+TISSUE PAPER OD:5.2mm YELLOW PVC JACKET.

\*\*\*CONNECTORS:

- 2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.  
 \* PIN: BRASS WITH GOLD PLATED.  
 \* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
 \* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
 \* O-RING: SILICONE RUBBER RED COLOR.  
 \* MOLDED: PUR YELLOW COLOR.
- 3.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N RSEC-XXMU WWW.TTCO.COM"
- 4.TEST: \* CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: \* CURRENT RATING: 4A VOLTAGE RATING: 250V
- 6.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: \* PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: \* MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION  
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):  
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);  
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)  
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR  
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

	PART NO. M12X1-05R0422YL-Fxxx		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:  AREA      REVISIONS      HK      DATE					
	DWG NO. M12X1-05R0422YL-Fxxx	CHECKED BY CY						FILE NO.	
焯倫股份有限公司	UNIT / mm	SCALE 1:1	PROJECTION	