

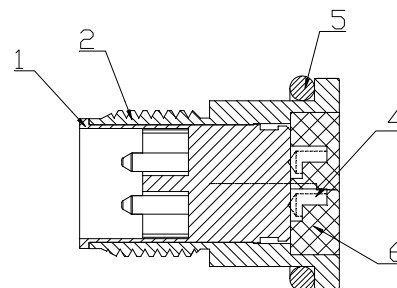

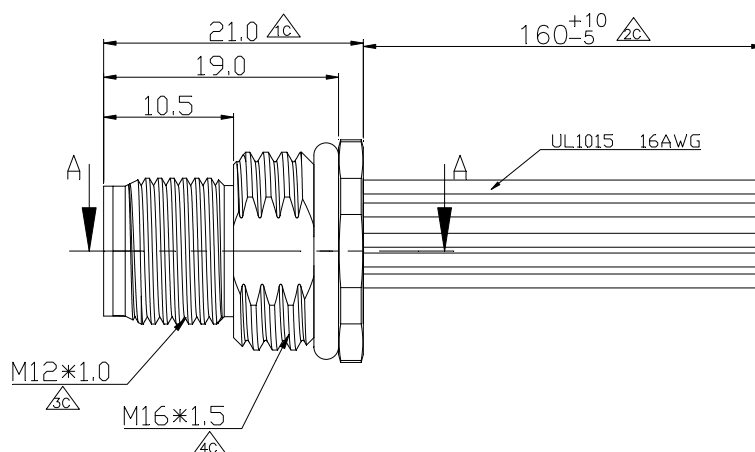



Panel Cut-out
建議板厚MAX : 3mm



Section: A-A

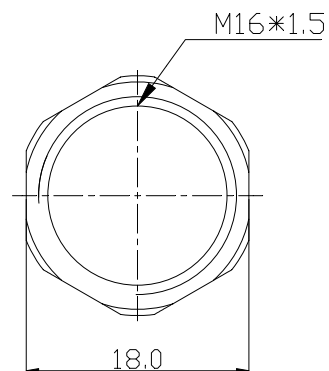

NOTES:

- 1.Current Rating: 16A
- 2.Rated voltage: 63V
- 3.Insulation Resistance: 100 Megaohm min.
- 4.Waterproof Rate: IP65 Mated

Material:

- 1.Plastic Housing : Engineering Plastic
Flammability Rating UL 94V-0. Color:BLACK
- 2.Coupling Nut : M12*P1.0 Brass With Nickel Plated
- 3.Screw Nut:Brass With Nickel Plated
- 4.Contacts : Copper Alloy With Gold Plating Over Nickel In Contact
- 5.O-RING : EPDM Rubber Black Color
- 6.Glue

△導通測試

P1	WIRE COLOR
1	RED
2	WHITE
3	BLUE
4	BROWN
FE	BLACK

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

M12X1-05L0016W1PBNO16-M16C-LF

SERIES

05 WAY L CODE

M16

WIRE

PANEL BACK

NUT+O-RING

16.0 DIA

MALE

LEADFREE

DESCRIPTION: M12 L Code 板端公頭(4+FE)-L 160mm