
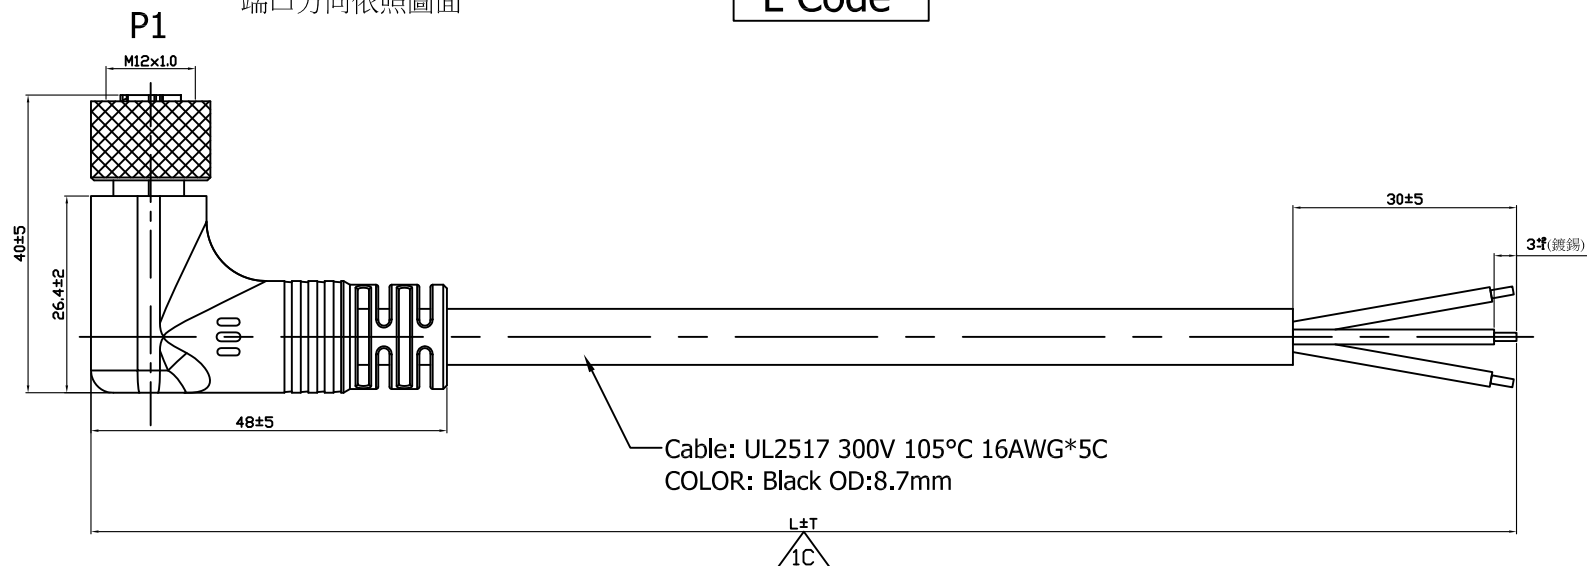



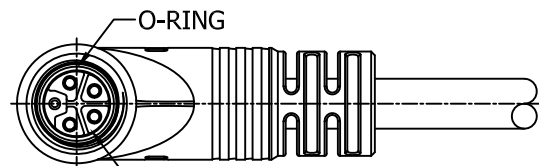

P1	WIRE COLOR
1	GRAY
2	WHITE
3	BLUE
4	BROWN
FE	Black

L±T
2000±5%
5000±5%

MATERIALS:

- 1.PLASTIC HOUSING : ENGINEERING PLASTIC
FLAMMABILITY RATING UL 94V-0.
- 2.CONTACTS : COPPER ALLOY WITH GOLD PLATING OVER NICKEL IN CONTACT
- 3.O-RING : EPDM RUBBER RED COLOR
- 4.COUPLING NUT : M12*P1.0 BRASS WITH NICKEL PLATED

NOTES: for M12-L

Current Rating: 12A
Rated voltage: 63V
Insulation Resistance: 100 Megaohm min.
Waterproof Rate: IP67

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M12X1-05LR0016BK-Fxxx-LF

SERIES

05 WAY L CODE

90°

16

AWG

BLACK

FEMALE

LEADFREE

2M:2000mm

5M:5000mm

DESCRIPTION: M12-2+FE(每-L-線-90度) for UL2517 Cable 銅皮鍍錫