


M12-5PIN FEMALE  
MOLDED PUR GRAY

M12x1



FRONT VIEW

PIN OUT

M12-5PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC
5	GRAY	NC
COUPLING NUT	DRAIN WIRE	NC

- (L=6'±2")
- (L=15'±6")
- (L=25'±1")

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司


www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/mm	SCALE 1:1
DATE	
SIZE A4	PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

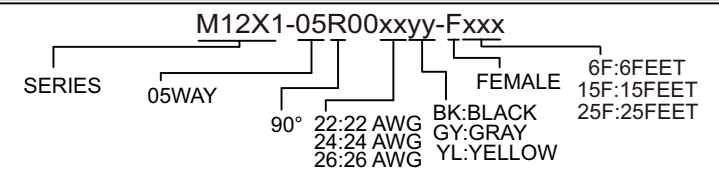

DESCRIPTION: M12-5PIN FEMALE TO OPEN (GRAY PVC JACKET)

**\*\*\*CONSTRUCTION:**

1.CABLE: \* UL2464 (5C/ 22#24#26# )+(ALUMINUM-MYLAR FOIL+ 22#24#26# DRAIN WIRE)  
OD:5.2mm COLOR PVC JACKET.

**\*\*\*CONNECTORS:**

2.M12-5PIN: \* M12-5PIN FEMALE SOLDER TYPE.  
\* PIN: BRASS WITH GOLD PLATED.  
\* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.  
\* COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.  
\* O-RING: SILICONE RUBBER RED COLOR.  
\* FERRULE: BRASS WITH NICKEL PLATED.  
\* MOLDED: PUR GRAY COLOR.

3.LABEL: \* PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GRSEC-XX WWW.TTCO.COM"

4.TEST: \* CT: 2 Ohm. IS: 5M Ohm.

5.ELECTRICAL: \* CURRENT RATING: 2A VOLTAGE RATING: 250V

6.MECHANICAL: \* TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P

7.PACKING: \* PACK EACH CABLE IN A POLY BAG.

8.MATERIAL: \* MATERIAL WITH RoHS GRADE.

9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION  
(THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):  
UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);  
CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)  
(2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR  
(3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE


SIZE A4

PPOJECTION 

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**

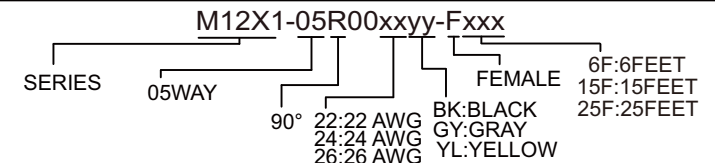

DESCRIPTION: M12-5PIN FEMALE TO OPEN (COLOR PVC JACKET)