


A Code

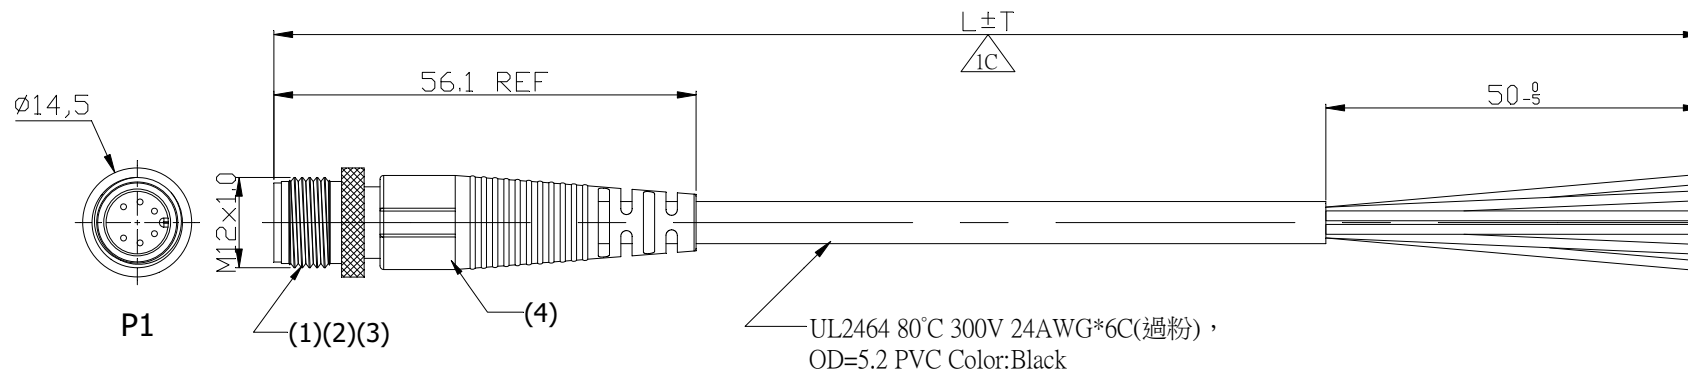

MATERIALS:

1. PLASTIC HOUSING : ENGINEERING PLASTIC
FLAMMABILITY RATING UL 94V-0. COLOR BLACK
2. CONTACTS : COPPER ALLOY WITH GOLD PLATING OVER NICKEL IN CONTACT
3. COUPLING NUT : M12*1 BRASS WITH NICKEL PLATED
4. OVER MOLD : PVC BLACK COLOR

 Current Rating: 2A(6 to 8PIN)
 Rated voltage: 30V AC/DC(6 to 8PIN)
 Insulation Resistance: 100 Megaohm min.
 Waterproof Rate: IP65

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38

.X ± 0.25

.XX ± 0.10

.XXX ± 0.05

ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

M12X1-060024BK-Mxxx-LF

SERIES

06 WAY

24 AWG

BLACK

MALE

LEADFREE

1M: 1000mm

2M: 2000mm

DESCRIPTION: M12-6P(公-A) to UL2464 24AWG 末端剥皮