


FRONT VIEW

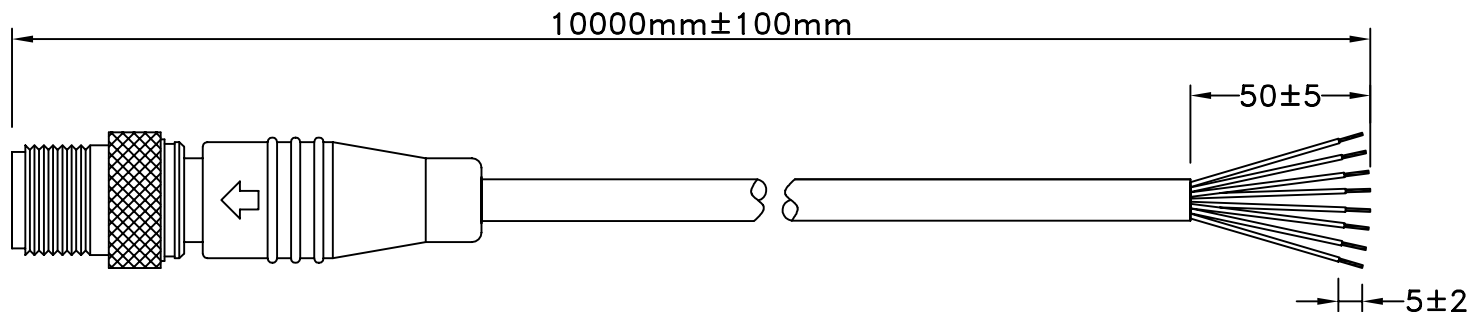

M12-8PIN MALE
MOLDED BLACK

***CONSTRUCTION:

1.CABLE: * UL2464(8C/24AWG)+T OD:5.0mm BLACK PVC JACKET.

***CONNECTORS:

2.M12-8PIN: * M12-8PIN MALE SOLDER TYPE.
* PIN: BRASS WITH GOLD PLATED.
* INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
* SHELL: BRASS WITH NICKEL PLATED.
* FERRULE: BRASS WITH NICKEL PLATED.
* MOLDED: PVC 45P BLACK COLOR.

3.TEST: * CT: 2 Ohm. IS: 5M Ohm.
* RATE CURRENT: 2A RATE VOLTAGE: MAX.60V

4.PACKING: * PACK EACH CABLE IN A POLY BAG.

5.MATERIAL: * MATERIAL WITH RoHS GRADE.

PIN OUT

M12-8M

1	BROWN	NC
2	WHITE	NC
3	YELLOW	NC
4	RED	NC
5	GREEN	NC
6	ORANGE	NC
7	BLACK	NC
8	BLUE	NC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

M12X1-080024BK-M10M-LF

SERIES

08 WAY

24 AWG

BLACK

MALE

LEADFREE
10000mm

DESCRIPTION: PIN MALE TO OPEN