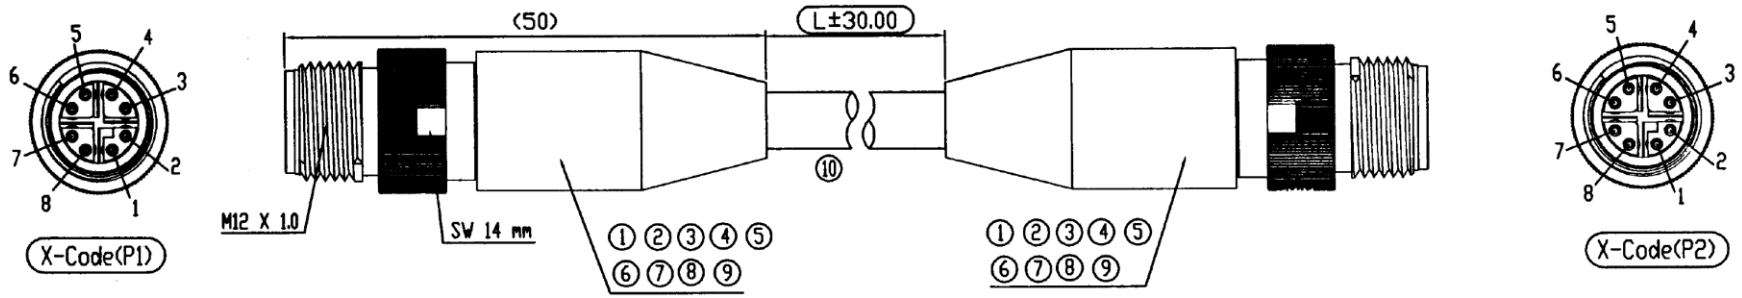

SPECIFICATION

ELECTRICAL

Current rating: 0.5 Amps max.

⚠ Voltage rating: 48 V AC/DC MAX

Temperature range: -25°C TO +85°C

ITEM	PART	DESCRIPTION
1	CONNECTOR	M12 X-Code Male Connector CONTACT GOLD PLATED 30u" OVER 50~100u" NICKEL
2	Front metal body	BRASS(C3604-EH) 50u"~100u" Nickel
3	Mid Holder for O.D 8.5mm	BRASS(C3604-EH) 50u"~100u" Nickel
4	Front Plastic Body	PA66 (6410G5) UL94V-0
5	Cable holder for O.D 8.5mm	PA66 (6410G5) UL94V-0
6	Crimp O Ring for O.D 8.5 mm Cable	Silicon rubber 60°
7	Rubber Boot	Silicon rubber 70°
8	Front metal shell	Zinc alloy 50u"~100u" Nickel
9	O RING	VITON (B 70)
10	CABLE	CAT 6A 26 AWG Jacket: TPU Jacket, Light Green OD:8.4±0.2mm

WIRING DIAGRAM

	X-Code(P1)	X-Code(P2)	
PAIR	1	1	WHITE/ORANGE
	2	2	ORANGE
PAIR	3	3	WHIITE/GREEN
	4	4	GREEN
PAIR	5	5	WHITE/BROWN
	6	6	BROWN
PAIR	7	7	WHITE/BLUE
	8	8	BLUE
SHELL		SHELL	

For SIP

(ST) For CmK/Cpk

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 5°
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

M12X2-08X08X26C6AGR-Mxx-LF

SERIES

08 X CODE TO 08 X CODE

26 AWG

CAT 6A

GREEN

MALE TO MALE

1M:1000mm

2M:2000mm

LEADFREE

DESCRIPTION: