


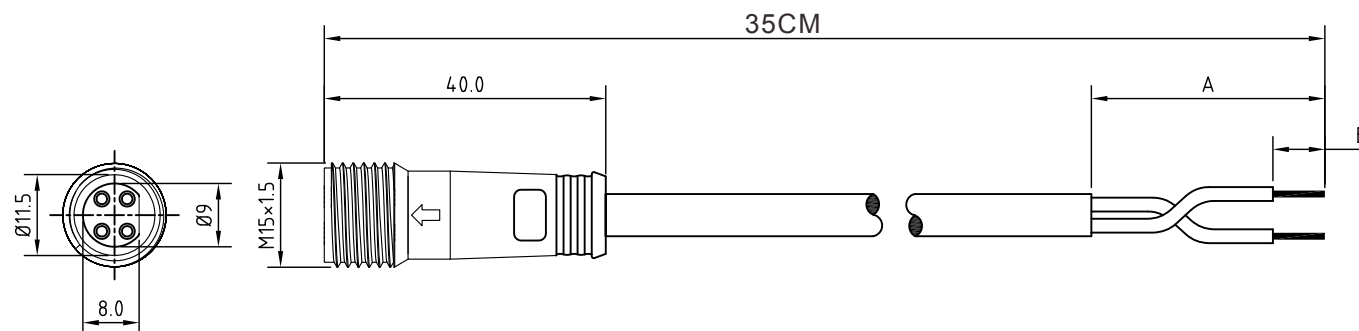

Specification of connector

General Characteristics

Locking system : screw M15
Termination : lathe/crimp, moulded
Shell protection : IP68

Electronical Characteristics

Rated voltage : 250V
Rated current : 7A
Contact resistance : $\leq 10\text{m}\Omega$
Insulation resistance : $>10\text{M}\Omega$

Materials

Pin contact : brass
Contact plating : nickel
Male insert : PA(nylon)
Ring nut : PA(nylon)

Specification of cable

Matrial Jacket	PVC	PUR
----------------	-----	-----

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

M15X1-0400BK20-F35C-LF
SERIES | 04 WAY | 20 AWG | BLACK | 35 CM | FEMALE | LEADFREE

DESCRIPTION: