


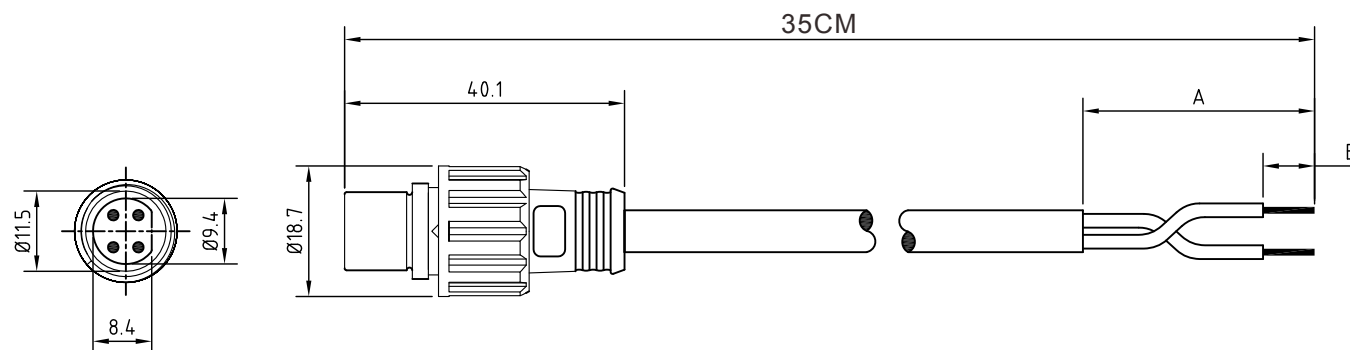

Specification of connector

General Characteristics

Locking system : screw M15
 Termination : lathe/crimp, moulded
 Shell protection : IP68

Electronical Characteristics

Rated voltage : 250V
 Rated current : 7A
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $>10\text{M}\Omega$

Materials

Pin contact : brass
 Contact plating : nickel
 Male insert : PA(nylon)
 Ring nut : PA(nylon)
 O-ring : rubber

Specification of cable

Matrial Jacket	PVC	PUR
----------------	-----	-----

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

M15X1-0400BK20-M35C-LF

SERIES

04 WAY

LEADFREE

35 CM
MALE
20 AWG
BLACK

DESCRIPTION: