


1. MATERIAL :
 - 1-1. HOUSING : NYLON UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. MAIN BODY : ZINC ALLOY
 - 1-4. LOCK SHELL : BRASS
 - 1-5. SPRING : STAINLESS
 - 1-6. ISOLATION : PVC
 - 1-7. CLAMPS : ZINC ALLOY
 - 1-8. CLAMPS BODY : ZINC ALLOY
 - 1-9. SCREW : BRASS
 - 1-10. BACK BODY : BRASS
 - 1-11. O-RING : EPDM ; COLOR : RED
 - 1-12. GLAND : SILICONE COLOR : BLACK
 - 1-13. GLAND CAGE : POM ; COLOR : WHITE
 - 1-14. GLAND NUT : ALUMINUM ALLOY
2. FINISH :
 - 2-1. CONTACT : GOLD FLASH
 - 2-2. MAIN BODY : NICKEL PLATED
 - 2-3. LOCK SHELL : NICKEL PLATED
 - 2-4. CLAMPS : NICKEL PLATED
 - 2-5. CLAMPS BODY : NICKEL PLATED
 - 2-6. SCREW : NICKEL PLATED
 - 2-7. BACK BODY : NICKEL PLATED
 - 2-8. GLAND NUT : SATING NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 3-4PIN 10A
7-8PIN 7A
 - 3-2. Rated Voltage : 300V
 - 3-3. Water proof : IP67 IP68
4. Environmental :
 - 4-1. Operation Temperature : -40℃~85℃

M16-PA-03	M16-PA-04	M16-PA-05	M16-PA-06	M16-PA-07	M16-PA-07B	M16-PA-08

RoHS Compliant

TOLERANCES ARE

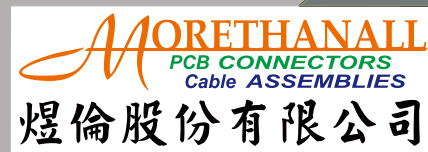

DRAWING BY CY		X, ± .X ± 0.20 .XX ± 0.10 .XXX ± 0.05 ANG ± 1°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	

照片框

ORDER INFORMATION

M16-PA-xx-LF
 SERIES | T LEADFREE
 03-08 WAY
 ASSEMBLY
 MALE

DESCRIPTION: WP M16 DIN (M) Assembly type

www.morethanall.com