

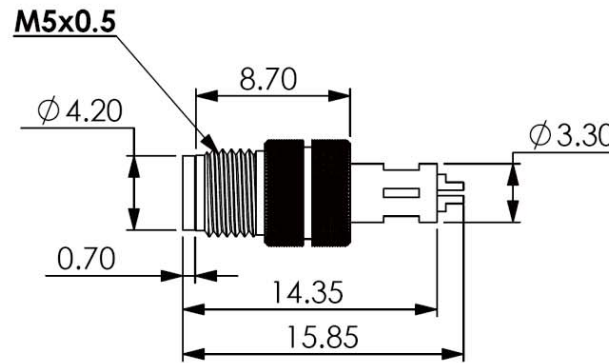


SECTION A-A

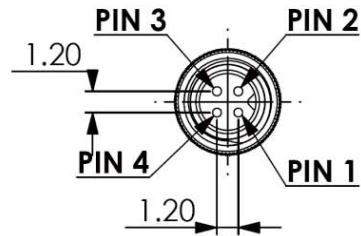

Specification :

Current : 1A  
 Operating temperature : -20°C to 85°C  
 Rated Voltage : 60V  
 Rated Input Voltage : 800V  
 IP67 Rated

No.	Description	Material	Treat	Q'ty
1	Housing	PUR		1
2	Screw Cap	Brass	Nickel Ptd.	1
3	Terminals	Brass	Gold Ptd.	4

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

M5-PS-04-LF  
 SERIES | LEADFREE  
 | 04 WAY  
 | SOLDER  
 | MALE

DESCRIPTION: