


7/8-16UN2A

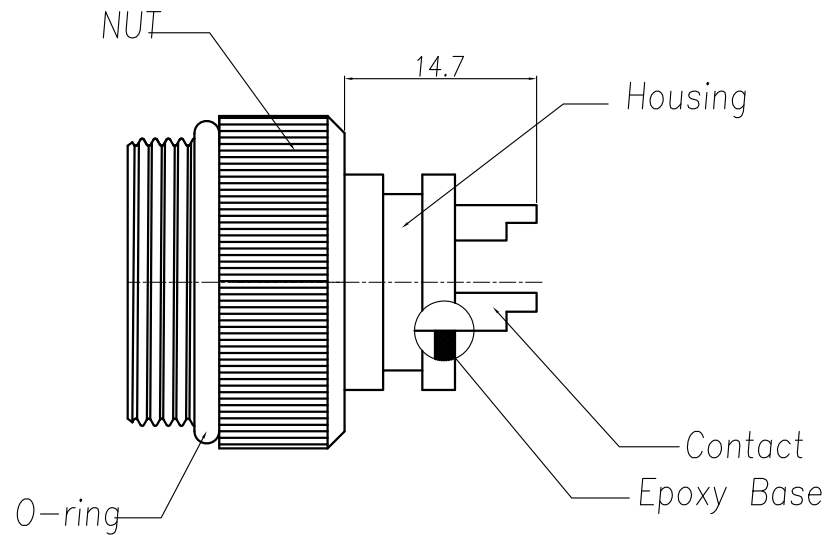

1. MATERIAL :
  - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
  - 1-2. CONTACT : BRASS
  - 1-3. NUT: BRASS
  - 1-4. O-RING :NBR; COLOR : BLACK
  - 1-5. Epoxy Base :EF400A&EF400B.COLOR:BLACK
2. FINISH :
  - 2-1. CONTACT : 30 MICRO INCHES MIN. GOLD PLATED  
UNDER PLATE : NICKEL
  - 2-2. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
  - 3-1. Rated current : 20A
  - 3-2. Voltage :125V
  - 3-3. Water proof: IPX8
4. Environmental :
  - 4-1. Operation Temperature : -20 ℃~85℃

M7S8-PS-03-LF  
LEADFREE

RoHS Compliant

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. M7S8-PS-03

DWG NO. M7S8-PS-03

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X. ± 0.20  
.X ± 0.10  
.XX ± 0.05  
.XXX ± 0.03  
ANG

DESCRIPTION: 防水頭 7/8 3PIN(M)杯口線端

AREA

REVISIONS

DATE

煜倫股份有限公司