
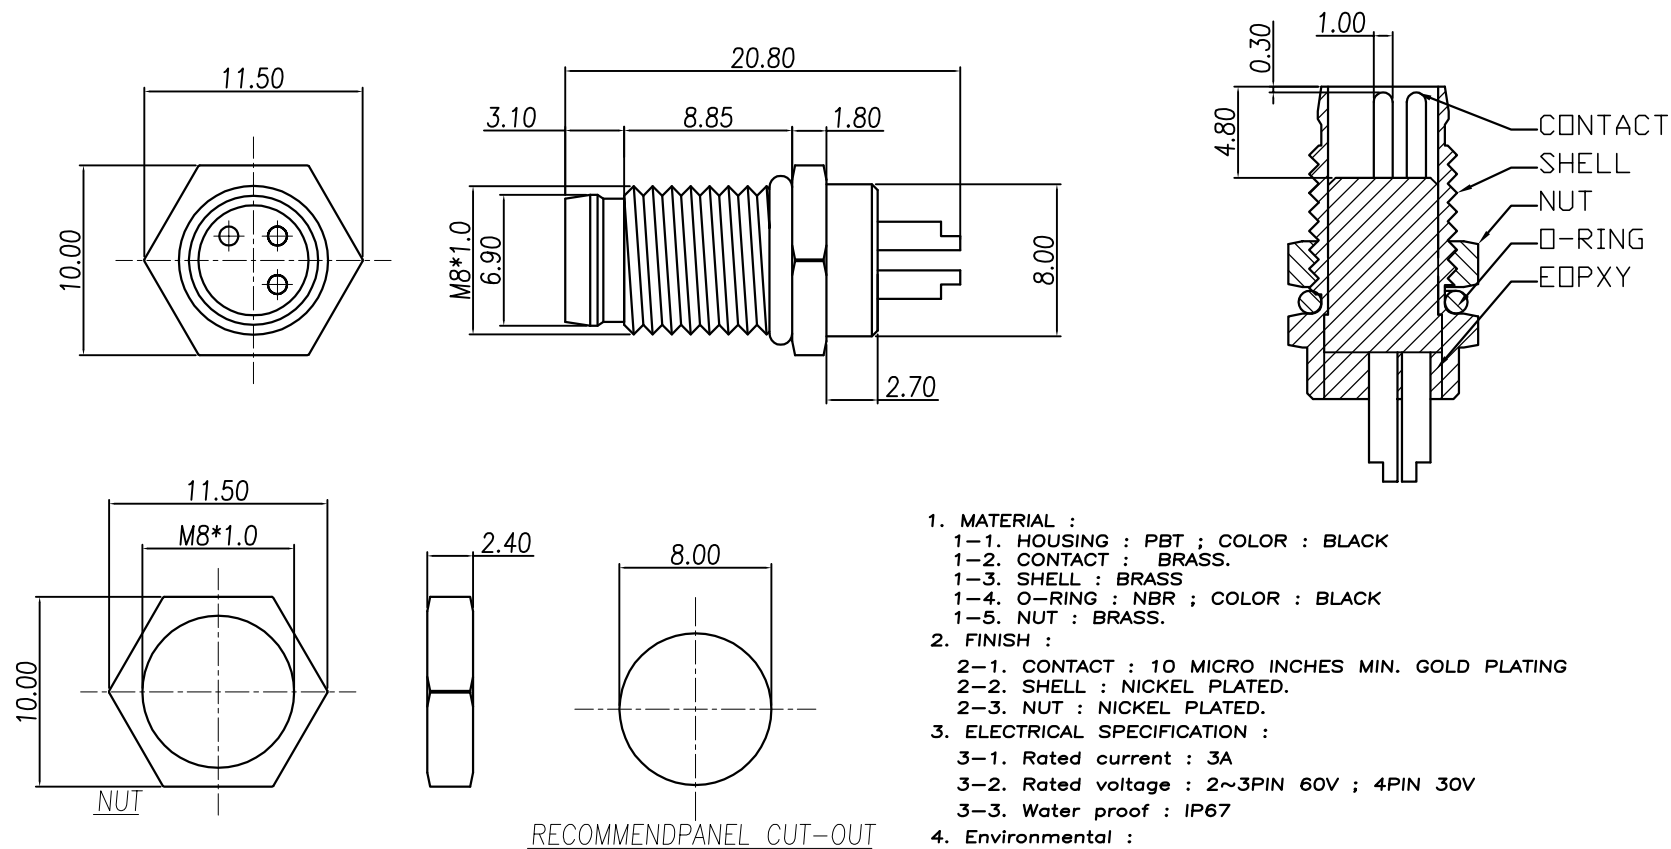






1. MATERIAL :
 - 1-1. HOUSING : PBT ; COLOR : BLACK
 - 1-2. CONTACT : BRASS.
 - 1-3. SHELL : BRASS
 - 1-4. O-RING : NBR ; COLOR : BLACK
 - 1-5. NUT : BRASS.
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATING
 - 2-2. SHELL : NICKEL PLATED.
 - 2-3. NUT : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 3A
 - 3-2. Rated voltage : 2~3PIN 60V ; 4PIN 30V
 - 3-3. Water proof : IP67
4. Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

TABLE A

M8-PSPBNO-04	防水頭 4P (M) 前鎖板M8*1.0 焊線式			
M8-PSPBNO-03	防水頭 3P (M) 前鎖板M8*1.0 焊線式			
M8-PSPBNO-02	防水頭 2P (M) 前鎖板M8*1.0 焊線式			
P/N	DESCRIPTION	4P	3P	2P

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

M8-PSPBNO-xx-LF
 SERIES | | | | LEADFREE
 | | | | 02~04 WAY
 | | | | RING
 | | | | NUT
 | | | | PANEL BACK
 | | | | SOLDER

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION 

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ± 1°

DESCRIPTION: 防水頭 (M) 前鎖板M8*1.0 焊線式