

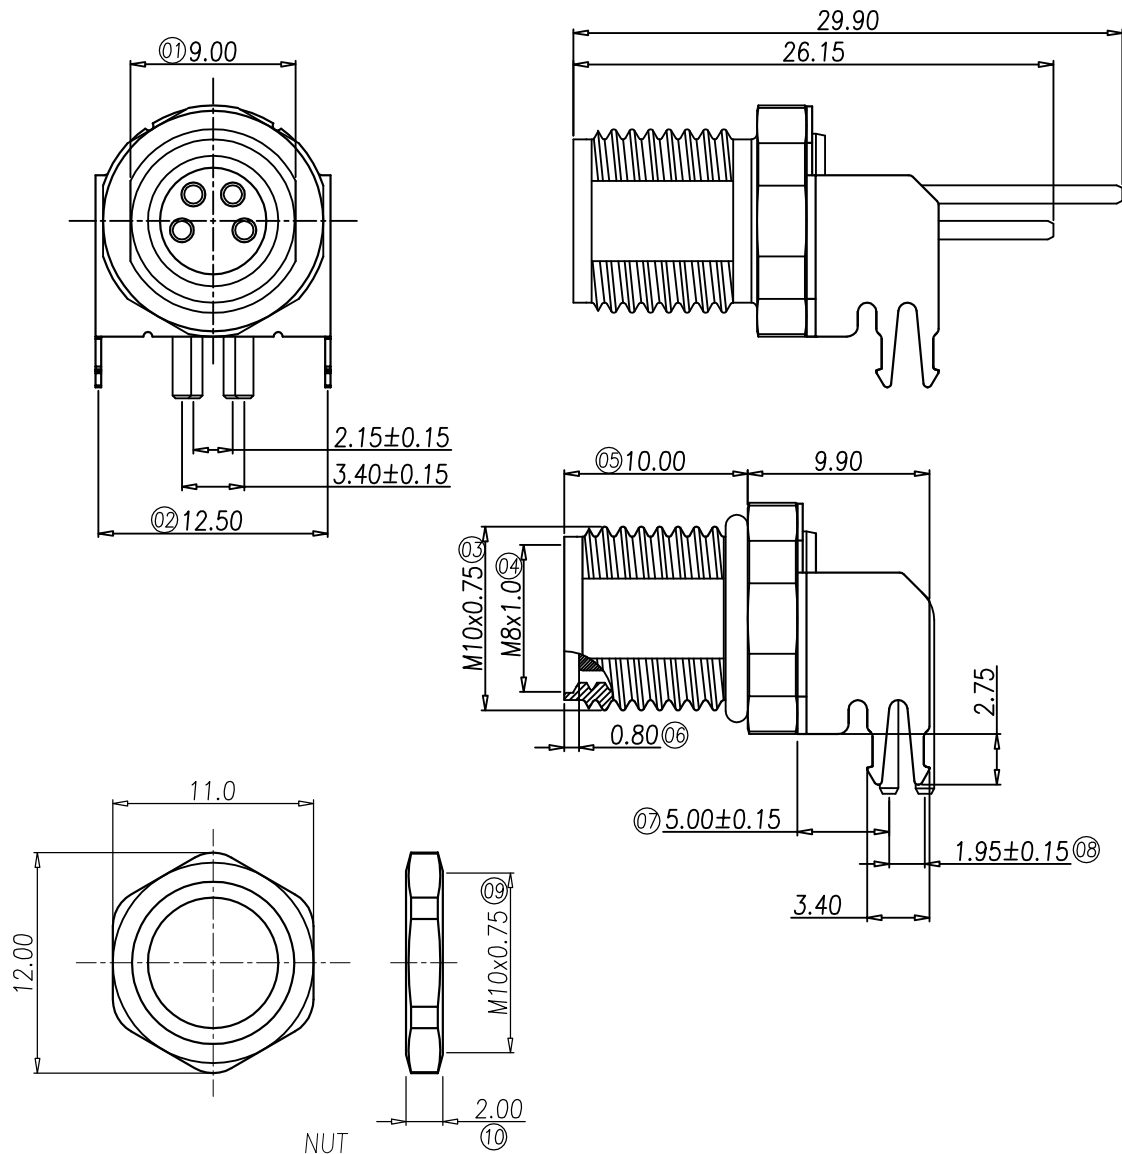


TABLE A/表A

M8-SRPBNO-02	M8-SRPBNO-03	M8-SRPBNO-04

PIN ASSIGNMENTS
FRONT VIEW

1. MATERIAL :

1-1. HOUSING : PA66 UL94V-0 ; COLOR : BLACK

1-2. CONTACT : BRASS.

1-3. NUT : BRASS.

1-4. SHELL : BRASS.

1-5. O-RING : NBR

1-6. GROUND : PHOSPHOR BRONZE

2. FINISH :

2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL

2-2. NUT : NICKEL PLATED

2-3. SHELL : NICKEL PLATED

2-4. GROUND : BRIGHT TIN PLATED

3. ELECTRICAL SPECIFICATION :

3-1. Rated current : 4A

3-2. Rated Voltage : 60V

3-3. Water proof: IP67

4. Environmental :

4-1. Operation Temperature : -40℃~85℃

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

M8-SRPBNO-xx-LF
SERIES
FEMALE
DIP 90°
LEADFREE
02.03.04 WAY
RING
NUT
BACK
PANEL

DESCRIPTION: Waterproof M8 4PIN (F) 前鎖 90° DIP+接地