

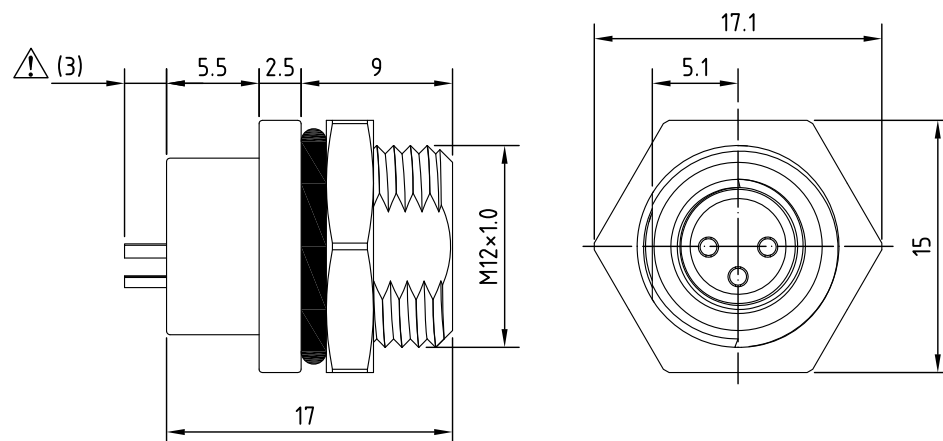


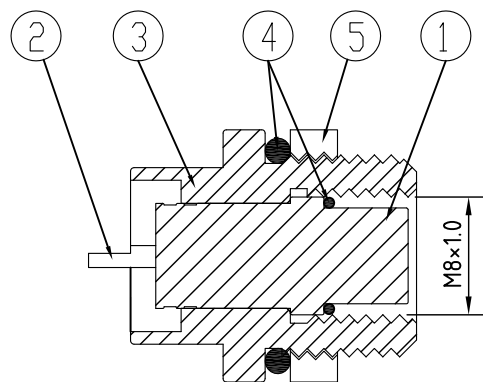

| CONTACT<br>ARRANGEMENT<br>FRONT VIEW<br>(FEMALE) |    |    |    |    |
|--------------------------------------------------|----|----|----|----|
|                                                  | 3P | 4P | 5P | 6P |

## Specification of connector

|                       |                           |          |
|-----------------------|---------------------------|----------|
| Locking system        | : screw M8                |          |
| Termination           | : solder                  |          |
| Shell protection      | : IP68                    |          |
| Rated voltage         | : 250V                    | 125V     |
| Rated current         | : 5A(3-4P)                | 2A(5-6P) |
| Contact resistance    | : $\leq 10\text{m}\Omega$ |          |
| Insulation resistance | : $>10\text{M}\Omega$     |          |



| 5    | Nut         | Brass    | Nickel plated  |
|------|-------------|----------|----------------|
| 4    | O ring      | Rubber   |                |
| 3    | Body        | Brass    | Nickel plated  |
| 2    | Pin         | Brass    | Gold plated    |
| 1    | Housing     | PA       | UL94V-0        |
| Item | Description | Material | Treat & Remark |

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm 0.50$   
X,  $\pm 0.30$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

## ORDER INFORMATION

M8-SSPBNO-xx-LF  
SERIES | LEADFREE  
FEMALE | RING | 03-06WAY  
NUT | PANEL BACK  
SOLDER

DESCRIPTION: