


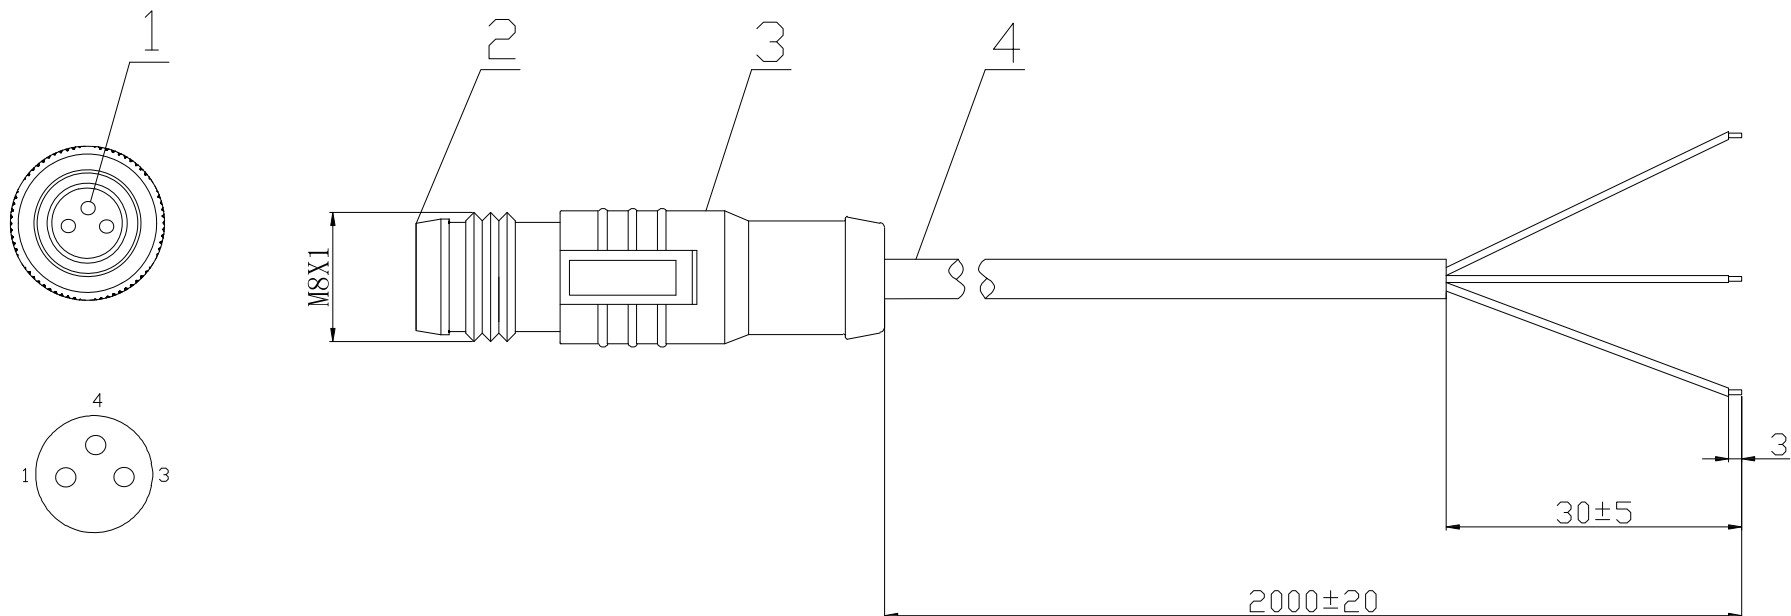

插头技术要求

TECHNICAL REQUIREMENTS FOR PLUGS

连接方式 Connection type	螺纹连接 Screwed joint
接线方式 Connection mode	焊接 Welding
温度范围 Temperature range	-25°C+80°C
污染等级 Pollution level	3
防护等级 Protection level	IP65
插接次数 Number of plugs	≥100
额定电压 Rated voltage	50V AC/DC
额定电流 Rated current	4A
接触电阻 Contact resistance	≤5
绝缘电阻 Insulation resistance	≥100

接线定义

Wire Diagram

P1	颜色 Color
1	棕 Brown
3	蓝 Blue
4	黑 Black

4	3*0.25 PUR UL 20549 24AWG 黑色外被 3*0.25 PUR UL 20549 24AWG Black outer covering	pc	1
3	M8 包胶成型 黑色PVC M8, Bonded molding, Black PVC	pc	1
2	M8 定制公胶芯 3芯 M8, Customized male plastic core, 3-core	pc	1
1	M8 焊线式公针 3芯 黄铜镀金 M8, Welded wire type male terminal, 3-core, Brass Gold plated	pc	3
No.	Specification	Unit	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

M8X1-030024BK-M2M-LF
SERIES
3 PIN
24 AWG
BLACK
MALE
LEADFREE
2000mm

DESCRIPTION: WIRE HARNESS