


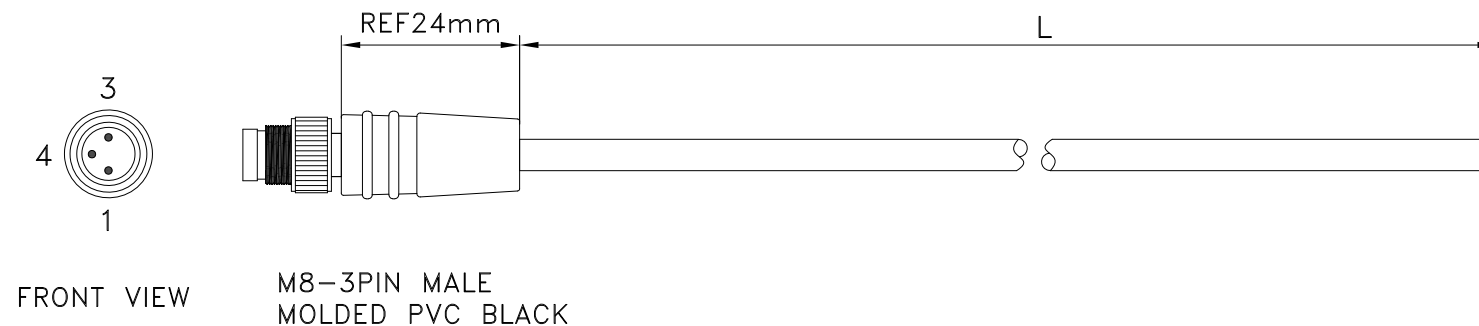

***CONSTRUCTION:

1.CABLE: * UL2464(4C/24#)+A OD:4.4mm BLACK PVC JACKET.

***CONNECTORS:

- 2.M8-3PIN: * M8-3PIN MALE SOLDER TYPE.
 * PINS: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * SHELL: BRASS WITH NICKEL PLATED.
 * MOLDED: PVC BLACK COLOR.

PIN OUT

M8-3M

1 ——— BROWN ——— NC
 3 ——— BLUE ——— NC
 4 ——— BLACK ——— NC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

M8X1-030024BK-Mxxx-LF
 SERIES 3 PIN 24 AWG BLACK MALE LEADFREE
 1M:1000mm
 2M:2000mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: