



包装方式：单PCS理线，

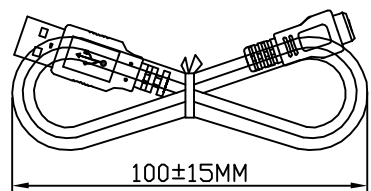

- ELECTRONIC TEST:**
1. 100% TEST, (Open, Short, Miss Wire).
 2. Contact Resistance: 2Ω/max.
 3. Insulation Resistance: 20MΩ/min.
 4. Hi-Pot: 300v dc/10ms.

OUT PIN

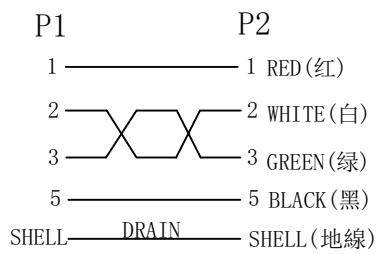

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。


4	PVC:45P 黑色.			Kg/1K
3	MINI USB 5P FEMALE: GOLD FLASH CONNECTOR,NICKEL PLAIED SHELL,PLASTLC: BLACK.			Kg/1K
2	USB AM : TYPE GOLD FLASH CONNECTOR SHELL NICKEL PLASTLC:WHITE.	1		PCS
1	UL2725 28AWG*1P+28AWG*2C+AD OD:3.5mm USB 2.0 黑色外被 L=300MM.	1		PCS
ITEM	STANDARD SPECIFICATION	Q' TY		UNIT

RoHS Compliant

DRAWING BY CY		TOLERANCES ARE X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

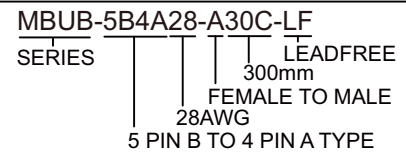

DESCRIPTION: USB AM TO MINI USP 5P/F CABLE BALCK L=300MM