


包装方式: 单PCS八字理线包装. 50PCS/袋.
贴上标签 (型号/年/月)


ELECTRONIC TEST:

- 100% TEST, (Open, Short, Miss Wire).
- Conduct Resistance: $2\Omega/\text{max}$.
- Insulation Resistance: $20M\Omega/\text{min}$.
- Hi-Pot: 300v dc/10ms.
- 符合环保

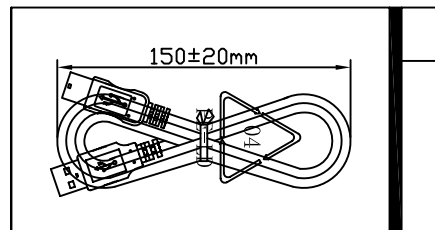

热封口

PIN OUT

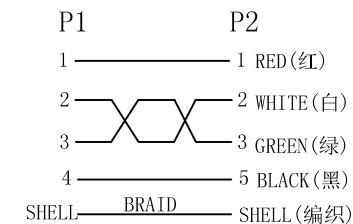

PART LIST: 本产品均符合“ROHS”规范环保标准. 用的材料均为相当品。

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
4	PVC: 45P BLACK.		KG/K
3	MINI USB BM: GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC: BLACK	1	SET
2	USB AM: GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC: WHITE	1	SET
1	CABLE: UL2725 28AWG*1P+28AWG*2C+AB OD: 3.5MM JACK BLACK L=1830MM	1	PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MBUB-5B4A28-M6F-LF

SERIES

LEADFREE

1830mm

MALE TO MALE

28 AWG

5 PIN B TYPE TO 4 PIN A TYPE

DESCRIPTION: USB AM TO USB MINI5P CABLE BLACK L=1830MM