



1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

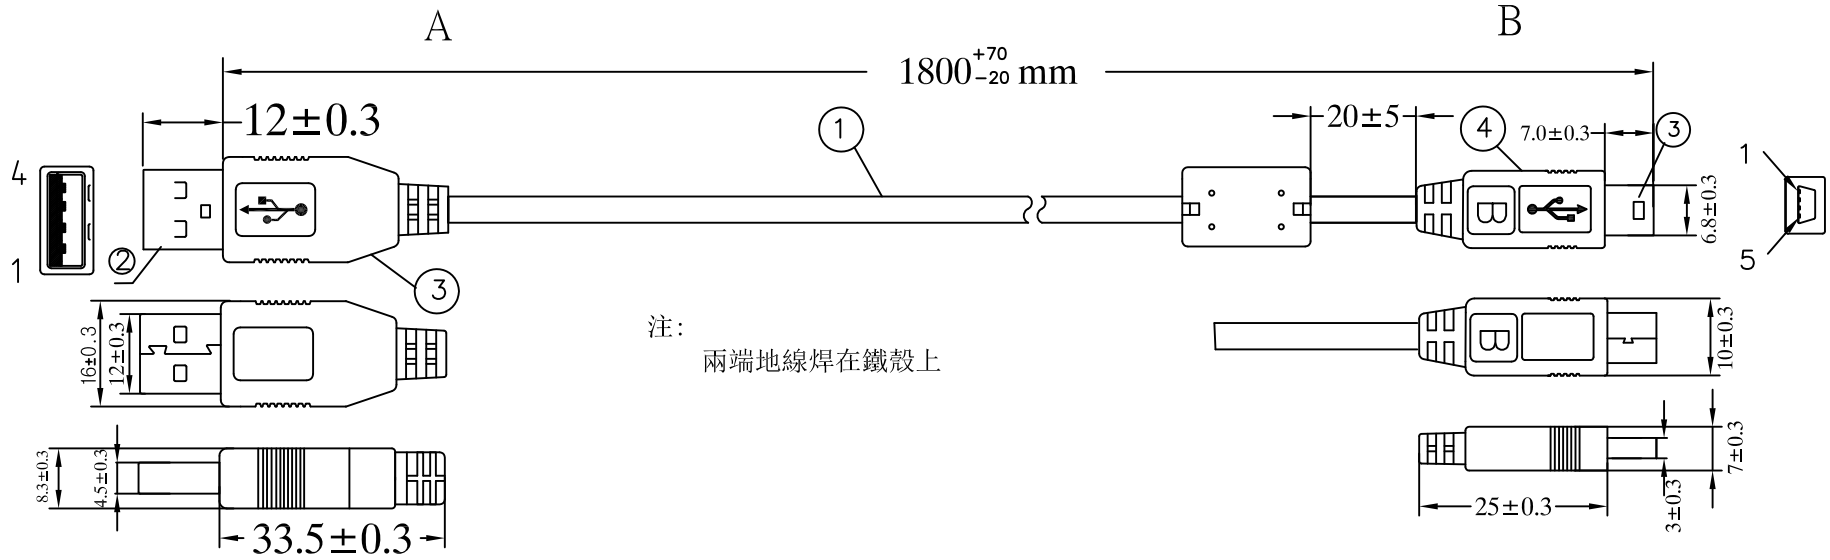

注：  
兩端地線焊在鐵殼上

PIN		OUT(接點)	
A		B	COLOR
1	——	1	RED
2	——	2	WHITE
3	——	3	GREEN
4	——	5	BLACK
SHELL	——	SHELL	DRAIN

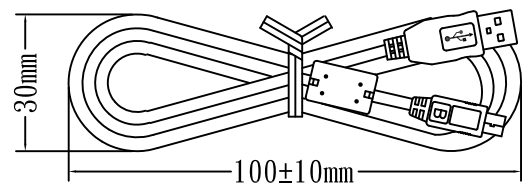

ELECTRICAL PROPERTIES:

- 100% Open Short Mis -Wire Test
- Contact Resistance: 2 ohm max
- Insulation Resistance: 10mega ohm min
- Hipot test: DC 100V 10ms

MBUB-5B4AFC-M1M8-LF  
LEADFREE

RoHS Compliant

5	OUTSIDE MOLD 45P PVC COLOR: BLACK	1	PC
4	CORE: 9.5*6.8*16.1mm	20	G
3	MINI USB 5P BLACK INSULATED OUT 4 PIN(超薄式)	1	SET
2	USB "A" TYPE MALE BLACK INSULATED	1	SET
1	UL2725 28AWG/1P+28AWG/2C+AEB(鋁鎂編) OD:3.5 JACKET COLOR: BLACK	1	PC
NO.	DESCRIPTION	Q'TY	UNITS



PART NO. MBUB-5B4AFC-M1M8

DWG NO. MBUB-5B4AFC-M1M8

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±

AREA

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AWG

REVISIONS

HK

DATE