


WIRING DIAGRAM

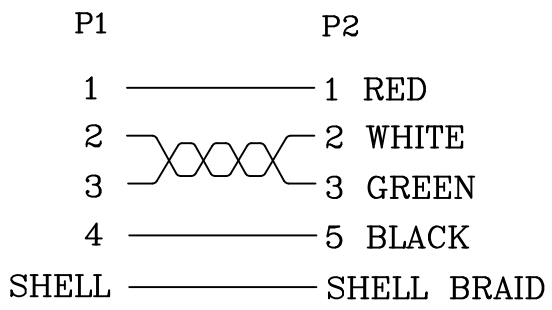

4	PVC	10	G	#WHITE 45P PVC
3	CONN.P2	1	SET	MINI USB 5P B TYPE MALE G/F BK
2	CONN.P1	1	SET	USB A TYPE MALE G/F WHITE
1	CABLE	2440	mm	UL2725 28AWG*1P+28AWG*2C+AEB(4/16) OD:3.5±0.15mm #BLACK (VENDER FOR UL2725 USB1.1 APPROVED)
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

	PART NO. MBUB-5B4AR-M1M8		RoHS Compliant		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: USB A M 90° TO MINI USB 5P B L:1.8M			
	DWG NO. MBUB-5B4AR-M1M8		CHECKED BY CY			FILE NO. UNIT / mm SCALE 1:1	DRAWING BY		AREA REVISIONS HK DATE
		PROJECTION							