


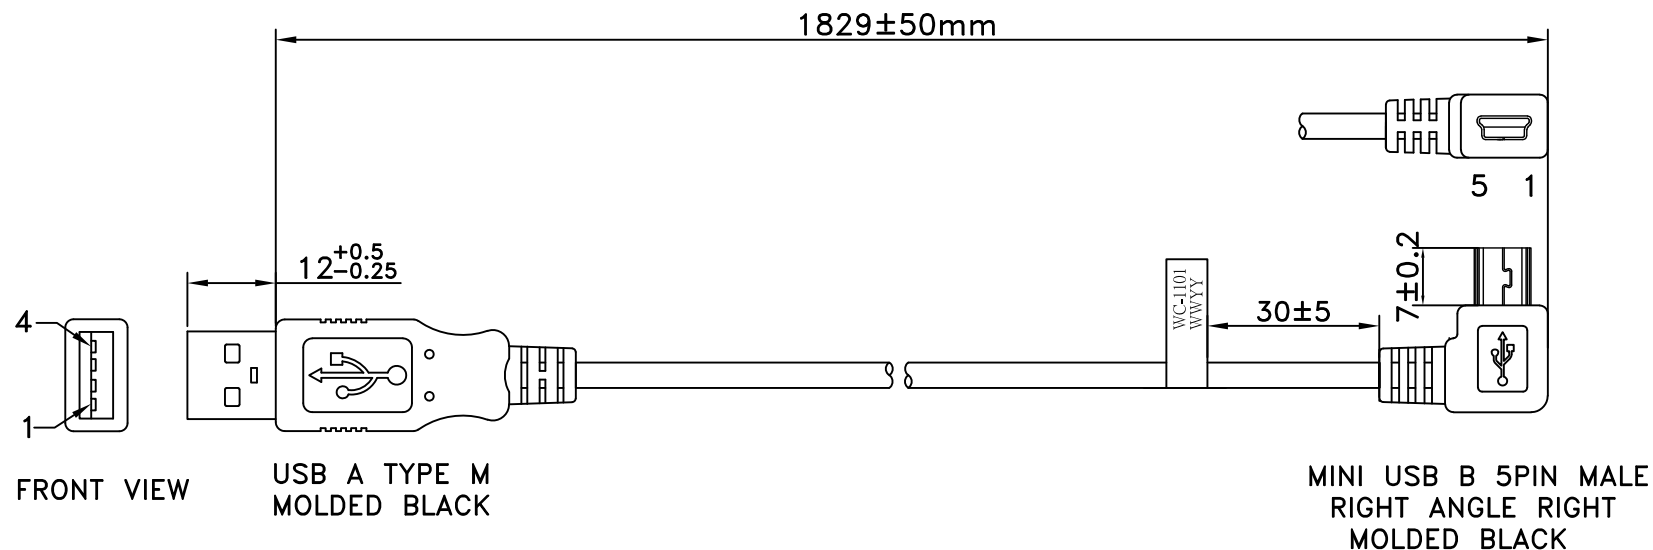

***CONSTRUCTION:

- 1.CABLE: * UL2725 28#/1PR+28#/2C+AEB65% OD:3.5mm
BLACK JACKET.

***CONNECTORS:

- 2.USB A/M: * USB A TYPE MALE SOLDER TYPE.
* PINS: BRASS WITH 30u GOLD PLATED.
* SHELL: STEEL WITH NICKEL PLATED.
* INSULATOR: WHITE COLOR P.B.T.
- 3.MINI-USB B/M: * MINI USB B TYPE 5P MALE SOLDER TYPE.
* PINS: BRASS WITH GOLD FLASH.
* SHELL: STEEL WITH NICKEL PLATED.
* INSULATOR: BLACK COLOR P.B.T.
- 4.HOOD: * MOLDED: BLACK COLOR PVC 45P.
- 5.TEST: * CT: 2 ohm IS: 20M ohm
- 6.LABEL: PRINT: "WC1101 WYYY"
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS 2 GRADE.

PIN OUT	
USB A M	MINI USB B M
1	RED
2	WHITE
3	GREEN
4	BLACK
SHEEL	DRAIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MBUB-5BR4A28-M6F-LF

SERIES

LEADFREE

1829mm

MALE TO MALE

28 AWG

5 PIN 90° B TYPE TO 4 PIN A TYPE

DESCRIPTION: USB A MALE TO MINI USB B MALE RIGHT-ANGLE RIGHT