


包裝方式: 10PCS/把, 再依照外箱大小裝入防水袋.

**ELECTRONIC TEST:**

1. 100% TEST, (Open, Short, Miss Wire).
2. Contact Resistance:  $1\Omega$ /max.
3. Insulation Resistance:  $20M\Omega$ /min.
4. Hi-Pot: 300v dc/10ms.

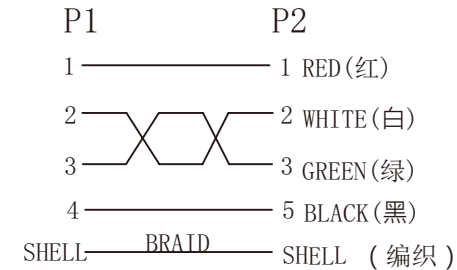

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。

4	PVC:45P 黑色			KG/K
3	USB MINI5P BM :GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:BLACK	1		SET
2	USB AM:GOLD FLASH CONNECTOR, NICKEL PLAIED SHELL, PLASTLC:WHITE	1		SET
1	CABLE:UL2725 28AWG*1P+28AWG*2C+AB OD:3.5MM 黑色外被 L=150MM	1		PCS
ITEM	STANDARD SPECIFICATION	Q' TY		UNIT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

**MBUB-5BRV4A28-M15C-LF**

SERIES

LEADFREE

150mm

MALE TO MALE

28 AWG

5 PIN B TYPE REVERSED TO 4 PIN A TYPE

DESCRIPTION: USB AM TO USB MINI 5P 90度 BM CABLE BLACK L=150MM