



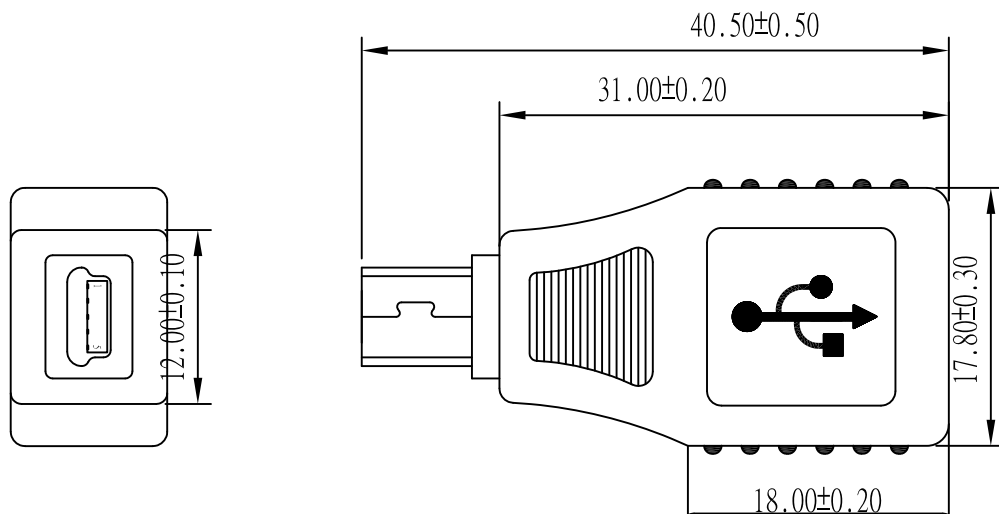

## PIN ASSIGNMENT

A Female miniusbB-5Male

|   |       |   |
|---|-------|---|
| 1 | _____ | 1 |
| 2 | _____ | 2 |
| 3 | _____ | 3 |
| 4 | _____ | 4 |
| G | _____ | 5 |
|   |       | G |

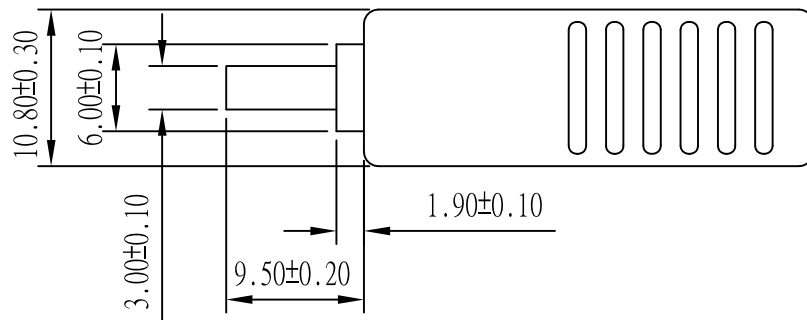

## INSULATOR MATERIAL

:PBT, UL 94V-0(usb white:miniusb black)

## CONTACT MATERIAL

:Brass, Gold Plated Over Nickel

## SHELL FINISH

:Nickel Silver

## OVERMOLD MATERIAL

△ MODEL PVC: 45P Black

## RoHS Compliant

## TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X, ±  
.XX, ±  
.XXX, ±  
ANG, ±



## ORDER INFORMATION

MBUB-EM-5B4A-LF

SERIES

LEADFREE

5 PIN B TYPE TO 4 PIN A TYPE

MOLDING  
MALE TO FEMALE

DESCRIPTION: