




A Male

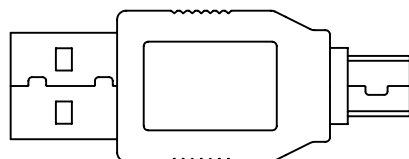

5Male

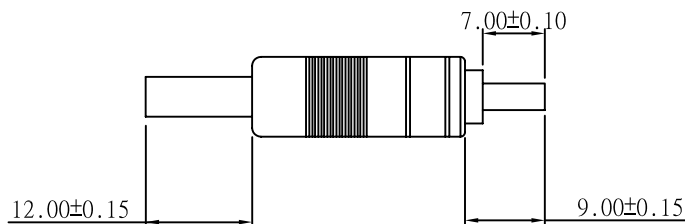

MBUB-MM-5B4A-LF
LEADFREE

RoHS Compliant

PIN ASSIGNMENT

A Male	5Male
1	1
2	2
3	3
4	4
G	5
	G

INSULATOR MATERIAL
:PBT, UL 94V-0
CONTACT MATERIAL
:Brass, Gold Plated Over Nickel
SHELL FINISH
:Nickel Silver
OVERMOLD MATERIAL
MODEL PVC: 45P
CURRENT RATING
:3AMP
DIELECTRIC STRENGTH
:500V AC for one minute
INSULATOR RESISTANCE
:1000MΩ min at 500V DC



PART NO. MBUB-MM-5B4A

DWG NO. MBUB-MM-5B4A

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

AM/mini usb-B 5M

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

