


Connt.1:MINI USB 5P MALE

Connt.2 MINI USB 5P FEMALE

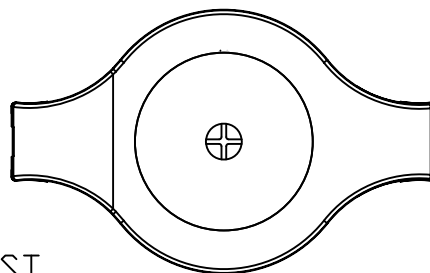

BACK

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. Hi-Pot: 300V DC/10ms

Pin Assignment

5MB	5FB
1	1
2	2
3	3
5	5
SHELL	SHELL

5	RETRACTABLE NADE OF ABS BLACK IN COLOR(Pushbutton)		
4	P.V.C MOLDING 55P COLOR: BLACK		9
3	MINI USB 5PIN B TYPE FEMALE SHELL PLATED:NICKEL CONTACT:G/F	1	Set
2	MINI USB 5PIN B TYPE MALE SHELL PLATED:NICKEL OONTACT:G/F	1	Set
1	CABLE:28AWG(30/0.08)*2C+32AWG(11/0.05)*1P OD:1.2*3.2mm JACKET COLOR:BLACK		
NO.	DESCRIPTION	Q'TY	UNITS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MBX2-5B5BRRT2832-A1M-LF

SERIES

LEADFREE
1000mm
FEMALE TO MALE
28 / 32 AWG
ROTARY
5 PIN TO 5 PIN 90° B TYPE

DESCRIPTION: