


ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10ohm
3. Insulation Resistance: 5Mega ohm
4. Hi-Pot: 300V DC/10ms

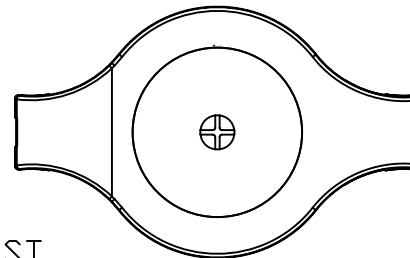

BACK

Pin Assignment

5MB	5FB
1	1
2	2
3	3
5	5
SHELL	SHELL

5	RETRACTABLE NADE OF ABS BLACK IN 000DR(Pushbutton)		
4	P.V.C MOLDING 55P COLOR: BLACK		9
3	MINI USB 5PIN B TYPE FEMALE SHELL PLATED:NICKEL CONTACT:G/F	1	Set
2	MINI USB 5PIN B TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F	1	Set
1	CABLE:28AWG(30/0.08)*2C+32AWG(11/0.05)*1P OD:1.2*3.2mm JACKET 000DR:BLACK		
NO.	DESCRIPTION	Q'TY	UNITS

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±  
.X±  
.XX±  
.XXX±  
ANG±

PJECTION

照片框

ORDER INFORMATION

MBX2-5B5BRT2832-E1M-LF

SERIES

LEADFREE  
1000mm  
MALE TO FEMALE  
28 / 32 AWG  
ROTARY  
5 PIN TO 5 PIN B TYPE

DESCRIPTION: