

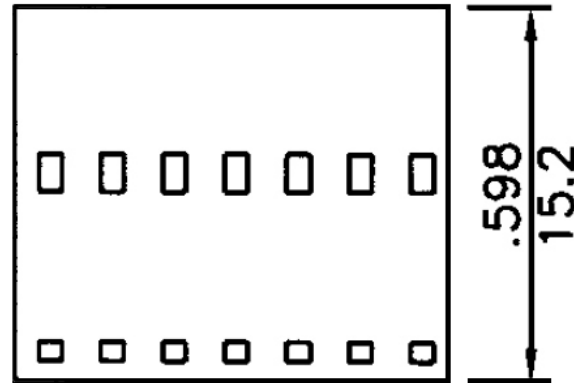


- * Poles:2-25
- * Material:PBT UL94V-0 ,BLACK

Specifications

- * Current rating: 2.5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

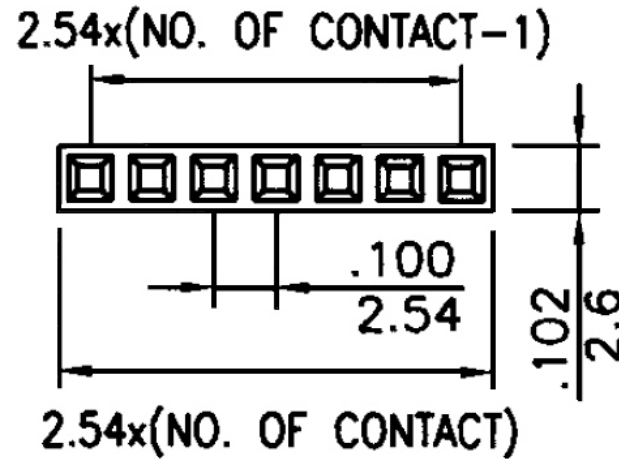

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

SIZE A4 PPROJECTION

ORDER INFORMATION

MCAF-HB-1Xxx-LF

SERIES | LEADFREE
 | 1X02:02WAY
 | 1X25:25WAY
 B TYPE
 HOUSING

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com