


1. TECHNICAL SPECIFICATIONS/技术指标

1.1 IMPEDANCE/阻抗	50Ω
1.2 FREQUENCY/频率	0~2GHz
1.3 VSWR/驻波	1.20MAX
1.4 TEMPERATURE RANGE/温度范围	-45°~+125°
1.5 CENTER CONTACT RESISTANCE/中心接触电阻	≤3MΩ
1.6 OUTER CONTACT RESISTANCE/外部接触电阻	≤2MΩ
1.7 INSULATOR RESISTANCE/绝缘电阻	≥5000MΩ
1.8 DIELECTRIC WITHSTANDING VOLTAGE/介质耐压	1000VRMS
1.9 DURABILITY/耐久性	500CYCLES

2. MATERIAL AND PLATING/材料与电镀

- 2.1 SHELL, BODY=BRASS, GOLD PLATED/壳体黄铜镀金
- 2.2 INNER CONTACT=BRASS, GOLD PLATED/内导体黄铜镀金
- 2.3 INSULATOR=PTFE/绝缘体聚四氟乙烯
- 2.4 RoHS COMPLIANT/符合RoHS

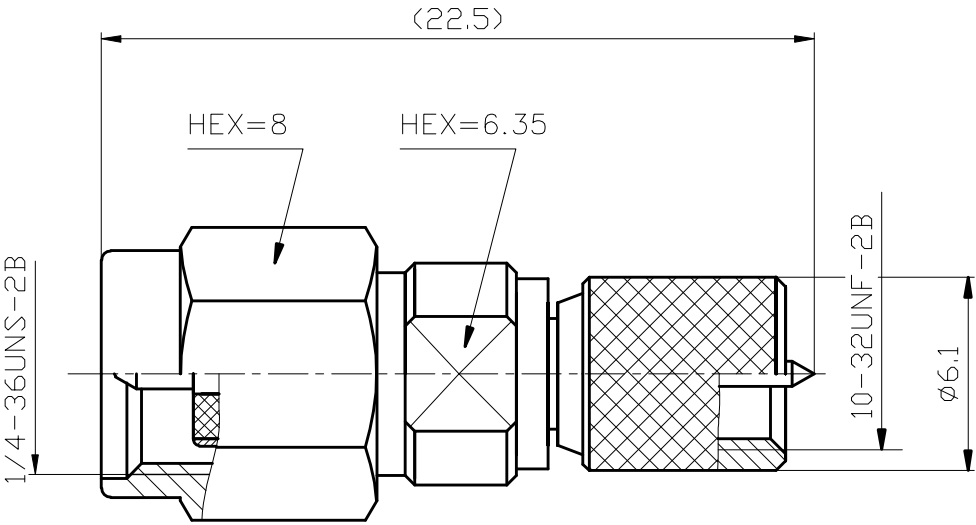

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

MCDSMA-MS-50-LF

SERIES

LEADFREE
50 OHM
MALE TO MALE

DESCRIPTION: