

Features:

- Used in 25407HM-N series housing
- Wire range: #22 ~ #24 AWG
- Thickness: 0.2mm
- Dual beam, fully enclosed box contact with locking lance
- Insulation O.D.: .064"(ø1.63mm) Max.


Specification:

- Current rating: 3A AC, DC
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 600V(R.M.S.) AC/minute
- Ambient temperature range: -40°C ~ 105°C

(Including temperature rise)

Ordering Information

Part No.	Material	Finished(Lead free)	Q'ty / Reel
MCE-T-22	Phosphor bronze	Tin-plated	10000 PCS
MCE-TG-22	Phosphor bronze	Gold flash	

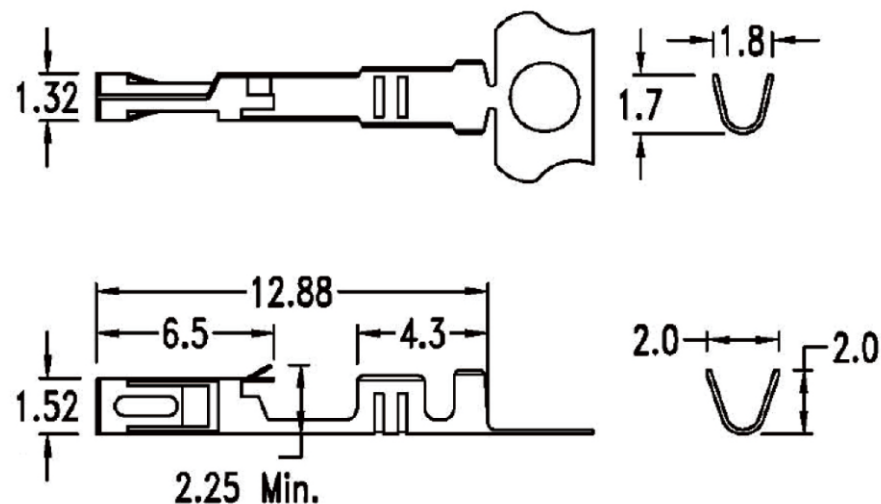

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MCE-Tx-22-LF
SERIES | T LEADFREE
22~24 AWG
BLANK: TIN PLATE
G: GOLD PLATE
TERMINAL

DESCRIPTION: 2.54mm (.100") Pitch Crimp Terminal