

Features:

- 2 ~ 12 circuits available
- Plastic material: PBT + 30% GF
- Pin material: Brass
- .025"(0.64mm) square pin
- Standard color: Black

Specification:


- Current rating: 3A
- Voltage rating: 250V
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

(including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	2.54 x (N - 1)	2.54 x (N + 1)

&& N = 2 ~ 12

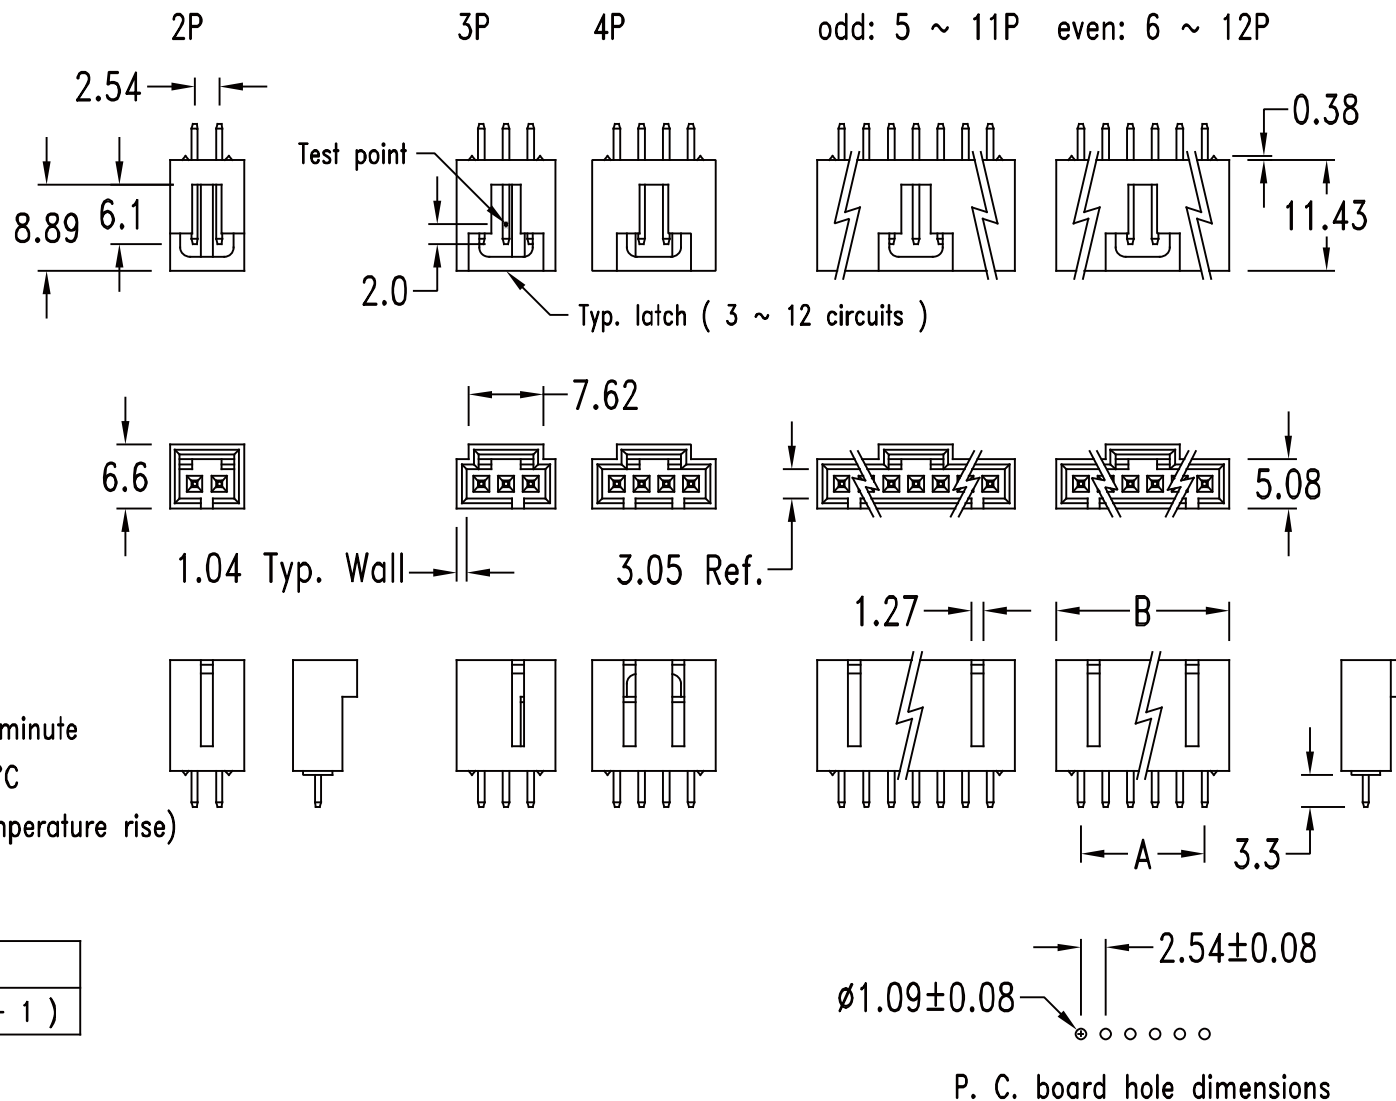

P. C. board hole dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

TOLERANCES ARE

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MCG-DG15-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X12:12WAY

GOLD 15u"

DIP 180°

DESCRIPTION: .100"(2.54mm) Vertical Header