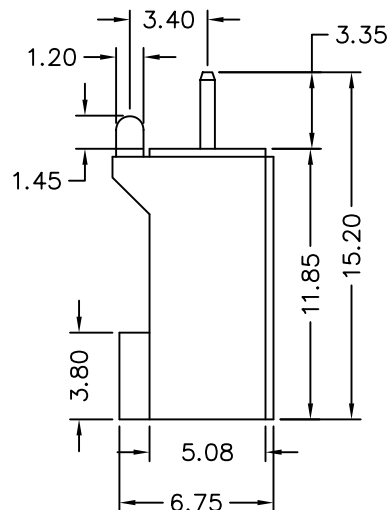
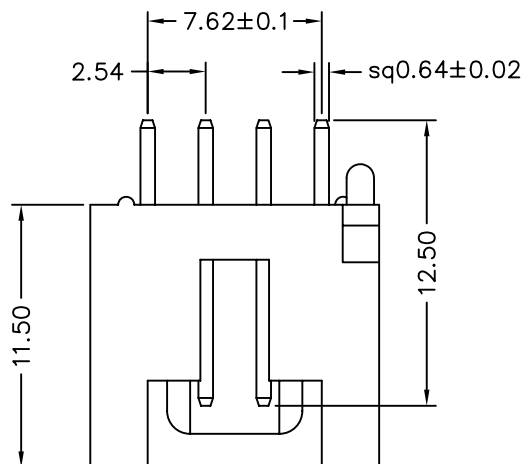


MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 1000MΩMin. at DC 500V

Contact Resistance : 30mΩMax. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -40°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MCG-DP1-1X04-LF
SERIES POST DIP 180°
LEADFREE
04 WAY

DESCRIPTION: