

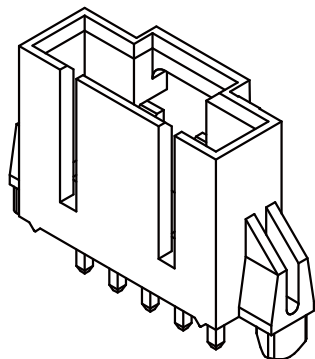




3P

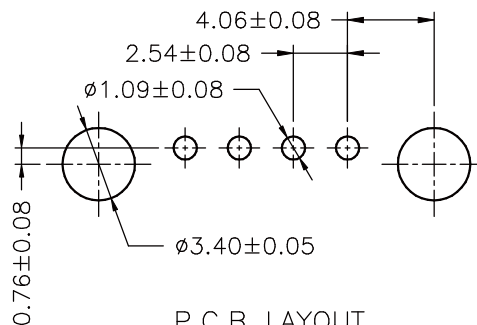


2P

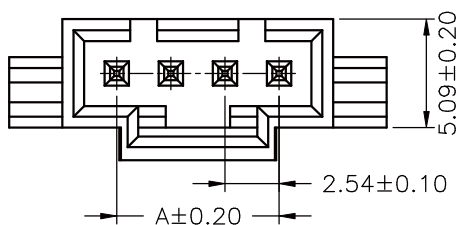

P.C.B LAYOUT

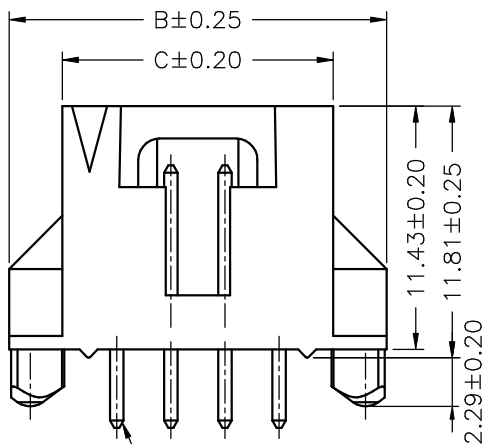

PIN 0.64 SQ,
Circuit 1

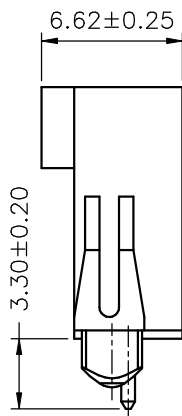

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Withstanding Voltage: 15000V AC/minute
Pin Material: Brass/Gold-flash
Material: PBT30%GF,UL94V-0
Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
MCG-DP2-1X02	2.54	12.63	7.63
MCG-DP2-1X03	5.08	15.17	10.17
MCG-DP2-1X04	7.62	17.71	12.71
MCG-DP2-1X05	10.16	20.25	15.25
MCG-DP2-1X06	12.70	22.79	17.79
MCG-DP2-1X07	15.24	25.33	20.33
MCG-DP2-1X08	17.78	27.87	22.87
MCG-DP2-1X09	20.32	30.41	25.41
MCG-DP2-1X10	22.86	32.95	27.95
MCG-DP2-1X11	25.40	35.49	30.49
MCG-DP2-1X12	27.94	38.03	33.03

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$



ORDER INFORMATION

MCG-DP2-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X12:12WAY

POST
DIP 180°

DESCRIPTION: 2.54mm PITCH 180°WAFER