


## Features:

- 2 ~ 12 circuits available
- Plastic material: PBT + 30% GF
- Pin material: Brass
- .025"(0.64mm) square pin
- Standard color: Black

## Specification:

- Current rating: 3A
- Voltage rating: 250V
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C


(including temperature rise)

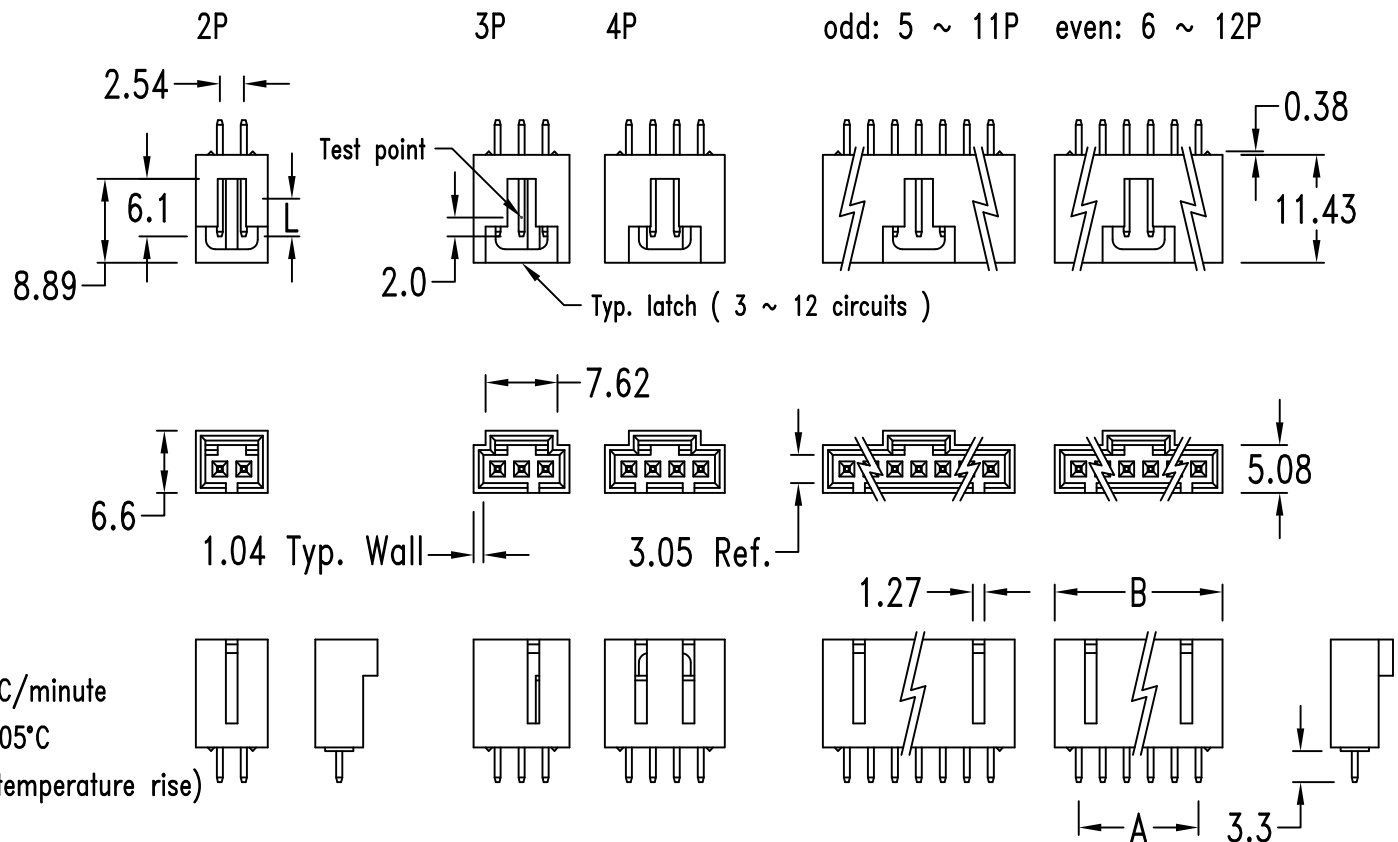

## Dimensional Information ( mm )

| Circuits | Dim. A           | Dim. B           |
|----------|------------------|------------------|
| N        | 2.54 x ( N - 1 ) | 2.54 x ( N + 1 ) |

&& N = 2 ~ 12



P. C. B. hole dimensions

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

照片框

## ORDER INFORMATION

MCG-DSxx-1Xxx-LF  
SERIES | LEADFREE  
1X02:02WAY  
1X12:12WAY  
S01:SEMI GOLD 1u"  
S06:SEMI GOLD 6u"  
DIP 180°

DESCRIPTION: