
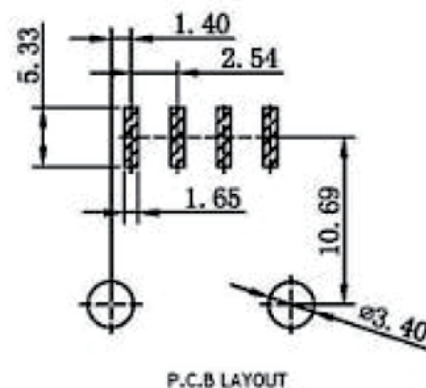



■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 20m Ω max

■ WAFER

Poles : 02-12
Material: LCP UL94V-0
Pin Material: Brass /Gold-flash

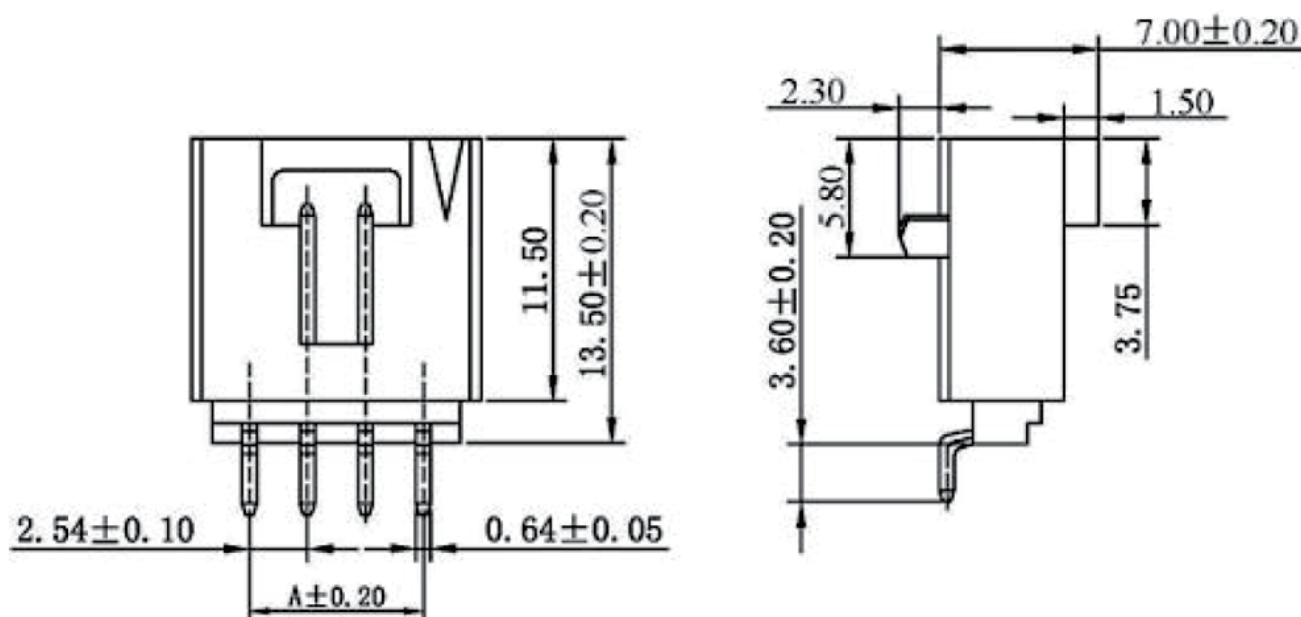

PART NO.	Dimensions (mm)	
	A	B
MCG-WPR-1X02	2.54	8.53
MCG-WPR-1X03	5.08	11.07
MCG-WPR-1X04	7.62	13.61
MCG-WPR-1X05	10.16	16.51
MCG-WPR-1X06	12.70	18.69
MCG-WPR-1X07	15.24	21.23
MCG-WPR-1X08	17.78	23.77
MCG-WPR-1X09	20.32	26.31
MCG-WPR-1X10	22.86	28.85
MCG-WPR-1X11	25.40	31.39
MCG-WPR-1X12	27.94	33.93

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION


照片框

ORDER INFORMATION



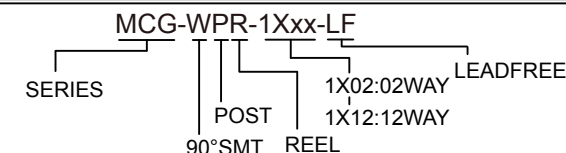


DESCRIPTION:

02-04 Contacts

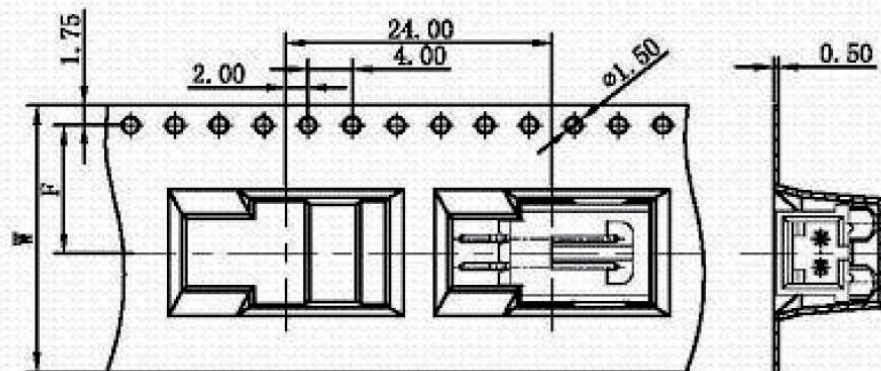

05-12 Contacts

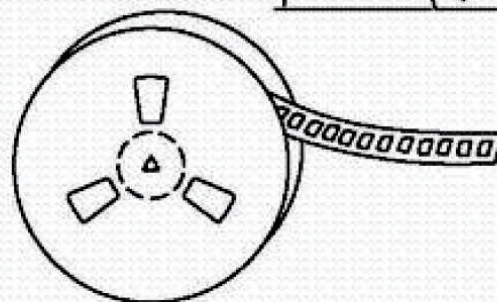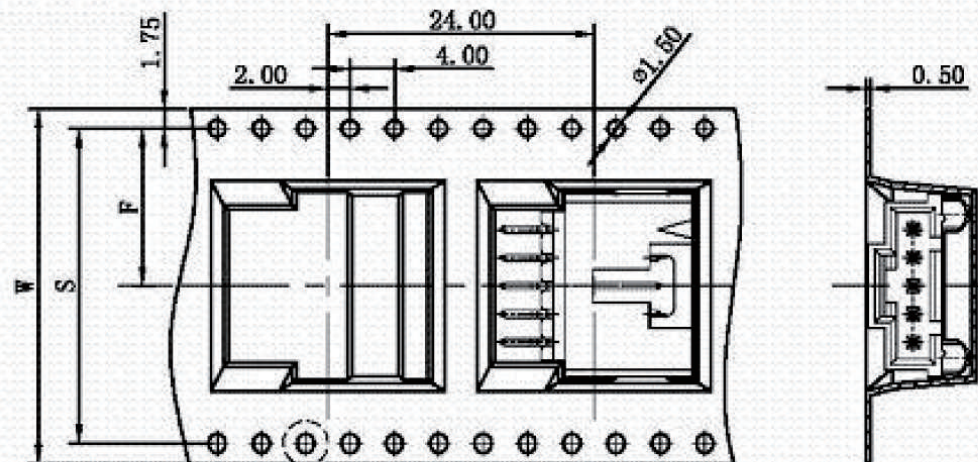

Number of Contacts	W ± 0.3	F ± 0.1	S ± 0.1	Q' ty/Reel
2P	24	11.50		250
3P	24	11.50		250
4P	24	11.50		250
5P	32	14.20	28.40	250
6P	44	20.20	40.40	250
7P	44	20.20	40.40	250
8P	44	20.20	40.40	250
9P	44	20.20	40.40	250
10P	44	20.20	40.40	250
11P	56	26.20	52.40	250
12P	56	26.20	52.40	250

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE


SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

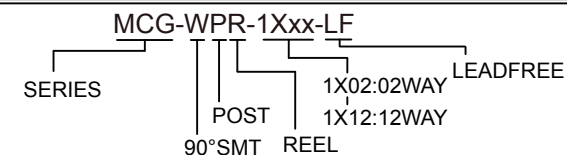

DESCRIPTION: