

Features:


- 2 ~ 12 circuits available
- Material: Nylon 46 94V-0 or 6T 94V-0
- Tin-plated brass pin
- .025"(0.64mm) square pin
- Standard color: Black

Specification:

- Current rating: 3A
- Voltage rating: 250V
- Contact resistance: 15mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.54	7.62	5	10.16	15.24	8	17.78	22.86	11	25.40	30.48
3	5.08	10.16	6	12.70	17.78	9	20.32	25.40	12	27.94	33.02
4	7.62	12.70	7	15.24	20.32	10	22.86	27.94			

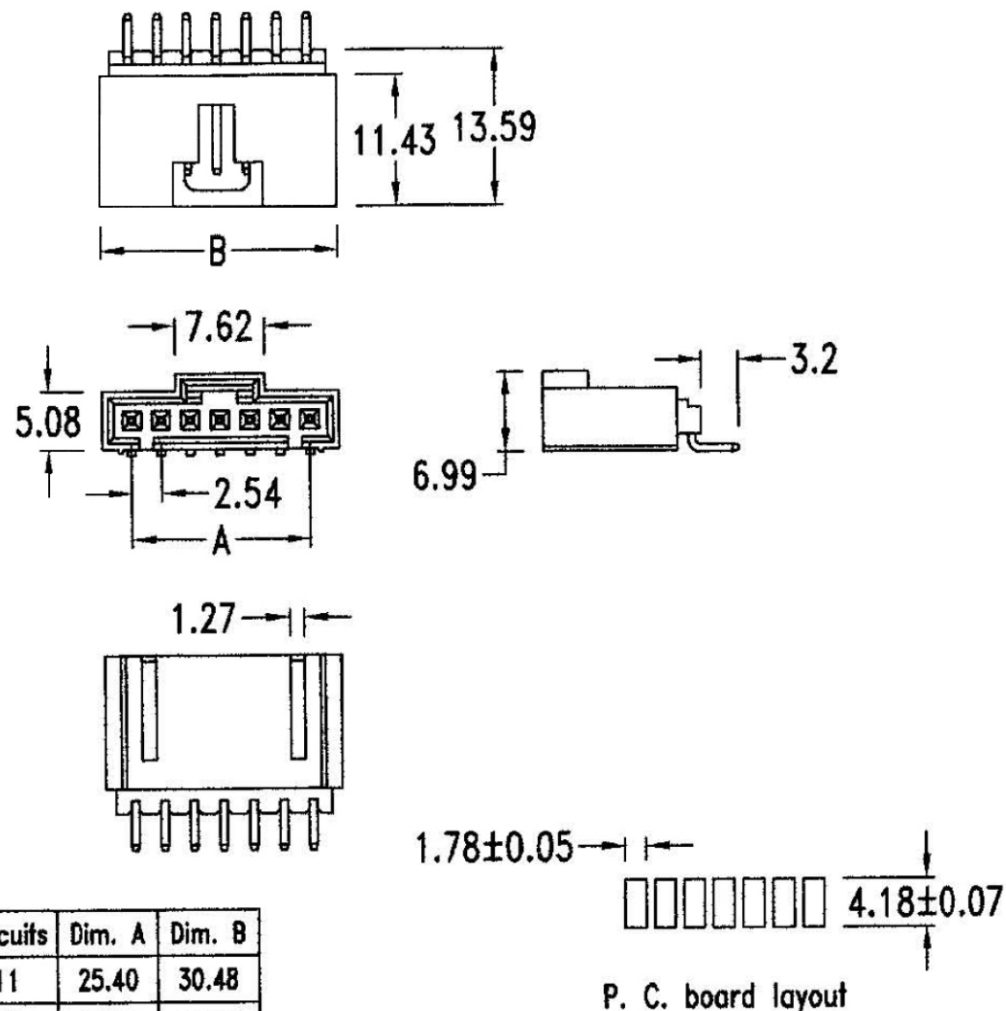

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MCG-WX-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X12:12WAY

NON POST

90° SMT

DESCRIPTION: