
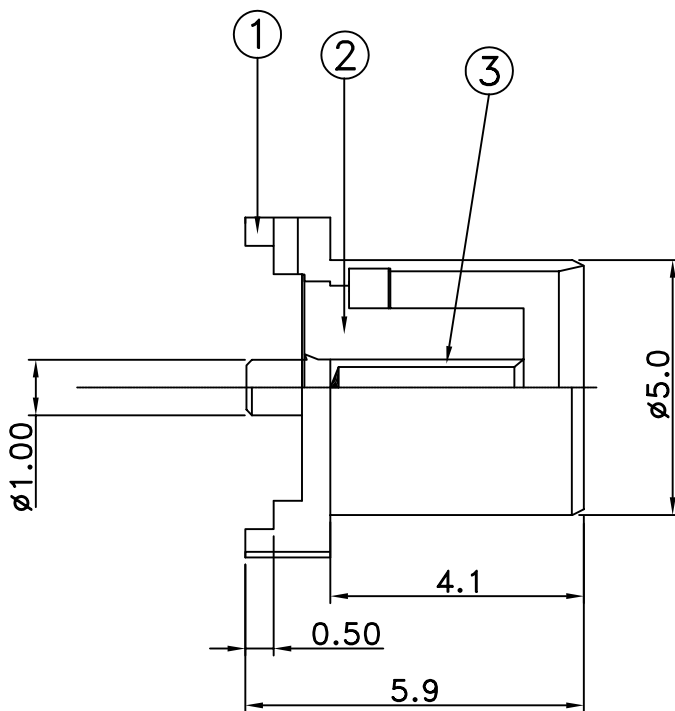


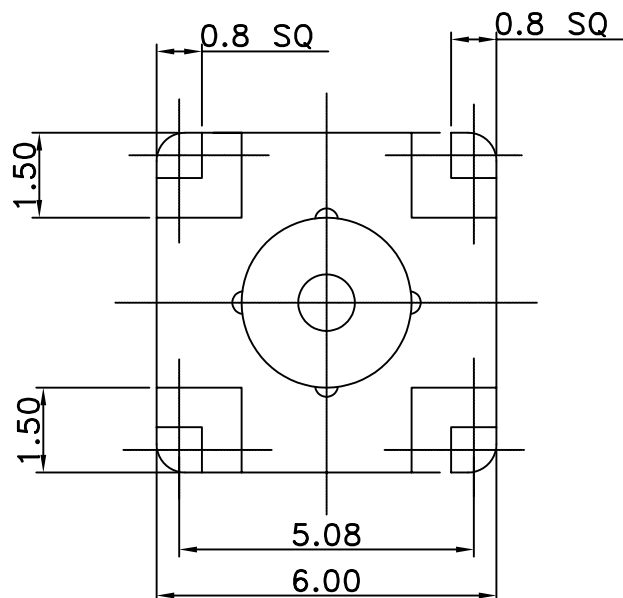

- UNLESS OTHERWISE SPECIFIED
- 1.REMOVE ALL BURRS.
 - 2.BREAK ALL CONNERS & EDGES CO.15 MAX.
 - 3.CHAMFER 1ST & LAST THREADS 45°.
 - 4.DIAMETERS ON COMMON CENTERS.
TO BE CONCENTRIC WITHIN 0.1 T.I.R.
 - 5.ALL DIMENSIONS ARE AFTER PLATING.

4				
3	Pin	1	Be Cu	Gold
2	Insulator	1	Teflon	None
1	Body	1	Brass	Gold
NO	Description	Q'ty	Material	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MCX-JV-50S-LF
SERIES T T T LEADFREE
SHORT
50 OHM
180°SMT
JACK

DESCRIPTION: MCX STRAIGHT PCB JACK