


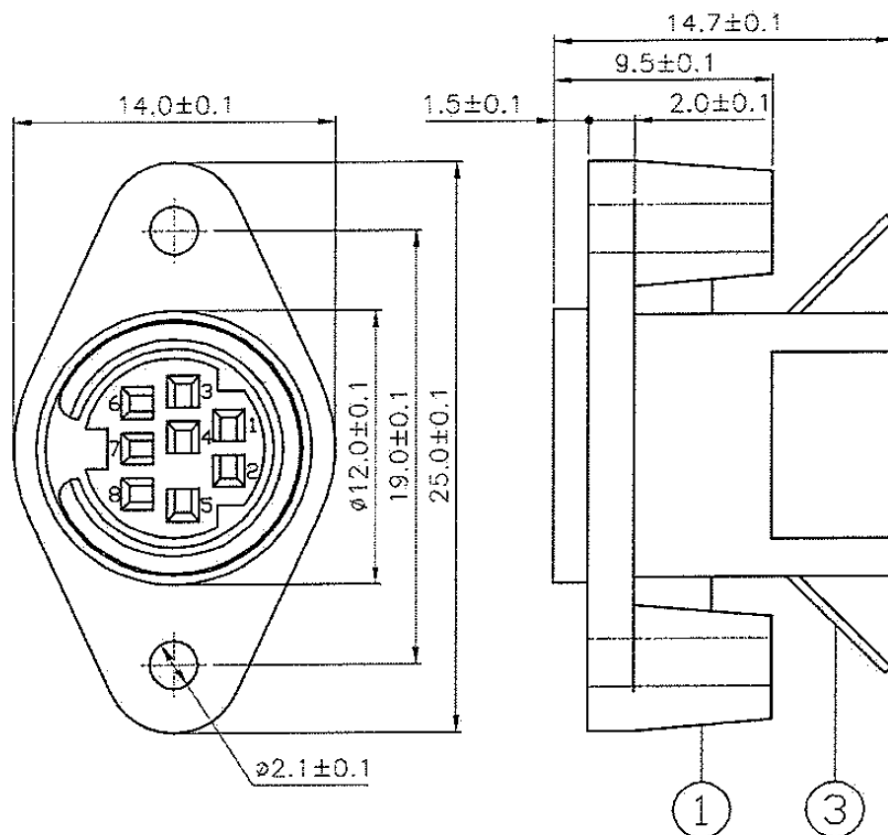

SPECIFICATIONS:

- CONTACT CARRYING CAPACITY : AC : 100V 1A MAX.
DC : 12V 2A MAX.
- CONTACT RESISTANCE : 30m OHM MAX.
- INSULATION RESISTANCE : 50M OHM MIN. AT DC 250V
- VOLTAGE WITHSTANCE : AC 250V FOR ONE MINUTE.
- INSERTION FORCE : 1.0 - 4.5KG
WITHDRAWAL FORCE : 0.8 - 3.0KG

3.	EARTH TERMINAL	1	BSR-H 0.4t	TIN	
1.	BODY	1	P.B.T.		UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS
REVISION	APPROVAL BY	CHECKED BY	DRAWD BY	UNITS	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDC-SPBE-08-LF

SERIES
LEADFREE
08WAY
EAR
BACK
PANEL
SOCKET

DESCRIPTION: