
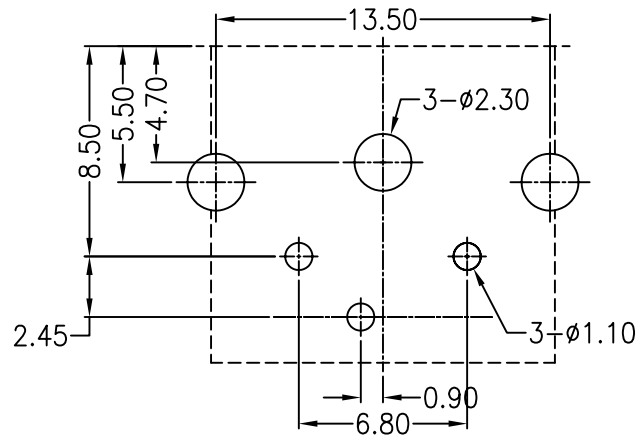


MATERIAL
 INSULATOR: PBT UL94V-0 Or LCP
 CONTACT: Phosphor bronze, Gold/Tin Plated
 SHELL: Brass, Tin Plated Or Nickel/Tin Plated
ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°C~105°C
ELECTRICAL
 CONTACT CURRENT RATING: 1 Amp
 DIELECTRIC WITHSTANDING : AC 500V/min.R.M.S.
 INSULATION RESISTANCE: 500M Ω min.at 500V DC
 CONTACT RESISTANCE: 30m Ω Max

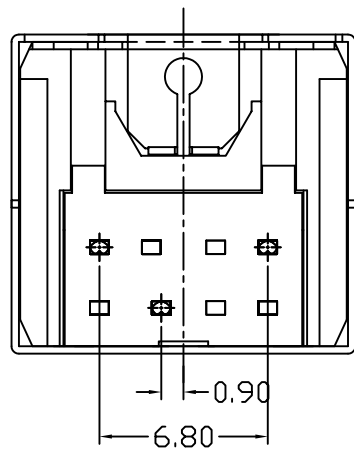

P.C.B. LAYOUT
BOTTOM VIEW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±

照片框

ORDER INFORMATION

MDJ-F-03-LF
 SERIES | LEADFREE
 03 WAY
 FULL METAL

DESCRIPTION: 迷你單層3P母半金黑(鐵殼鍍錫不加彈) 無毒