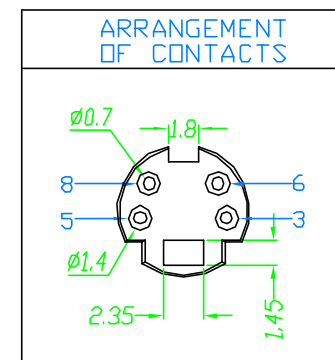
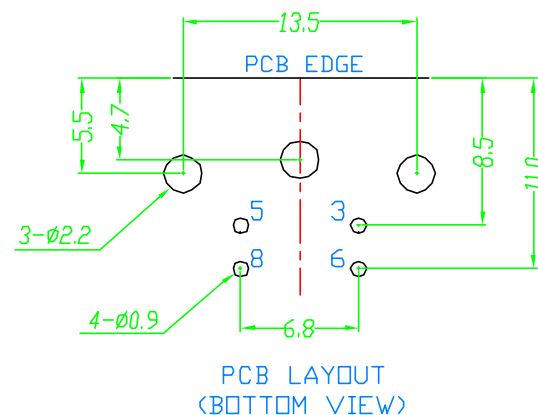
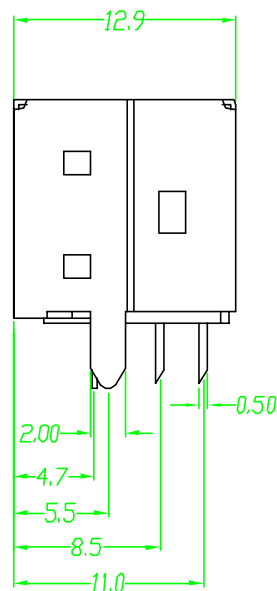
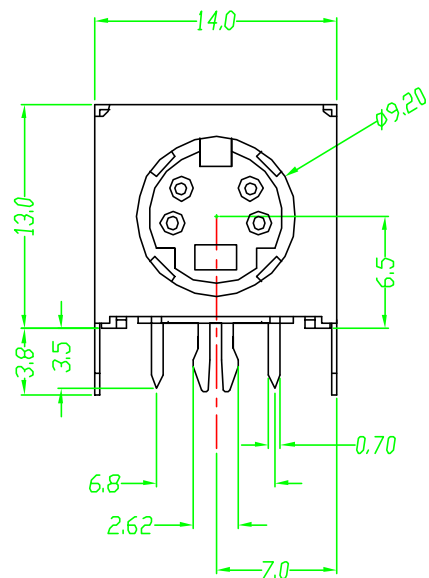


Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC

Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold1~3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)	4
3	SHIELD	BRASS T:0.3	TIN PLATED Sn:120~200u"	1
4	BOTTOM COVER	PBT G.F.	BLACK	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION


照片框

ORDER INFORMATION


MDJ-F-04-LF
SERIES T LEADFREE
04 WAY
FULL METAL

DESCRIPTION: MINI DIN JACK FLAT 4 PIN DIP


(1)



(2)

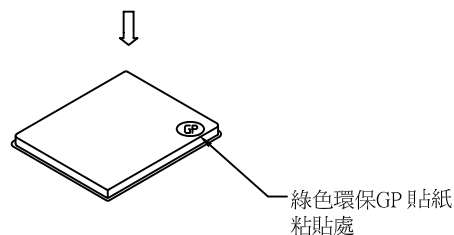

(3)

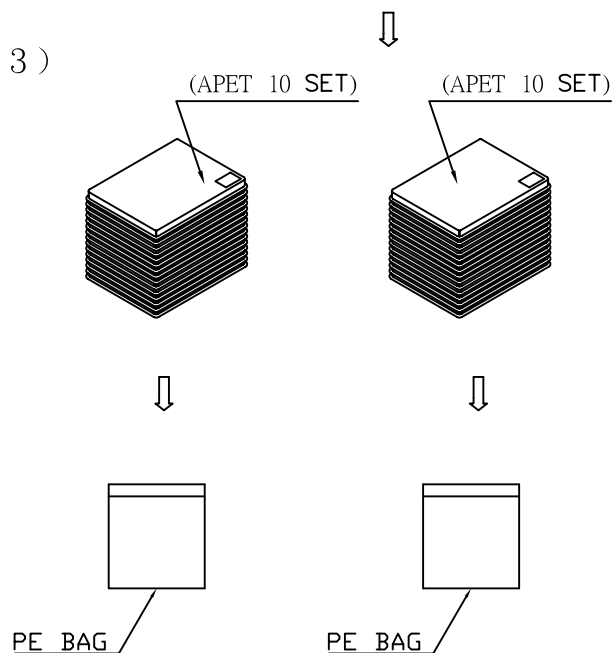

(1). 1pcs=3.75g

(2). PACKING MATERIAL(包裝材料): APET 1 SET(盒)

WEIGHT(重量): 375g

QUANTITY(規格): 100PCS

(3). PACKING MATERIAL(包裝材料): PE BAG(PE袋) 2 PCS


APET 20 SET(盒)

CARTON(紙箱)1 PCS

WEIGHT(重量): NET(淨重) 7.5kgs

GROSS(毛重) 9.2kgs

QUANTITY(規格): 100*20=2000PCS

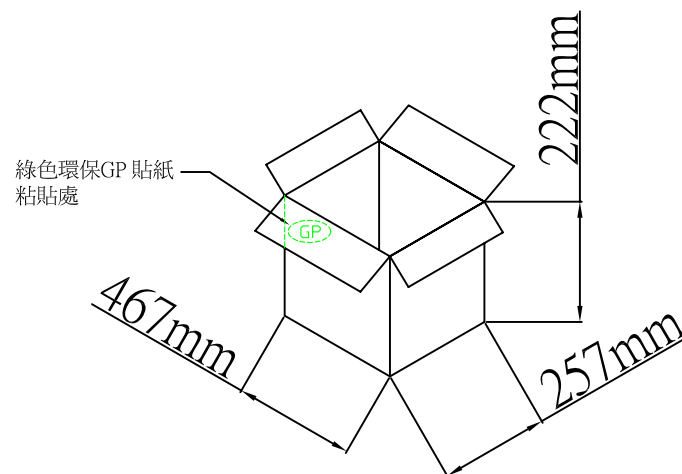

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.38
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

MDJ-F-04-LF
SERIES | LEADFREE
04 WAY
FULL METAL

DESCRIPTION: MINI DIN JACK FLAT 4 PIN DIP