


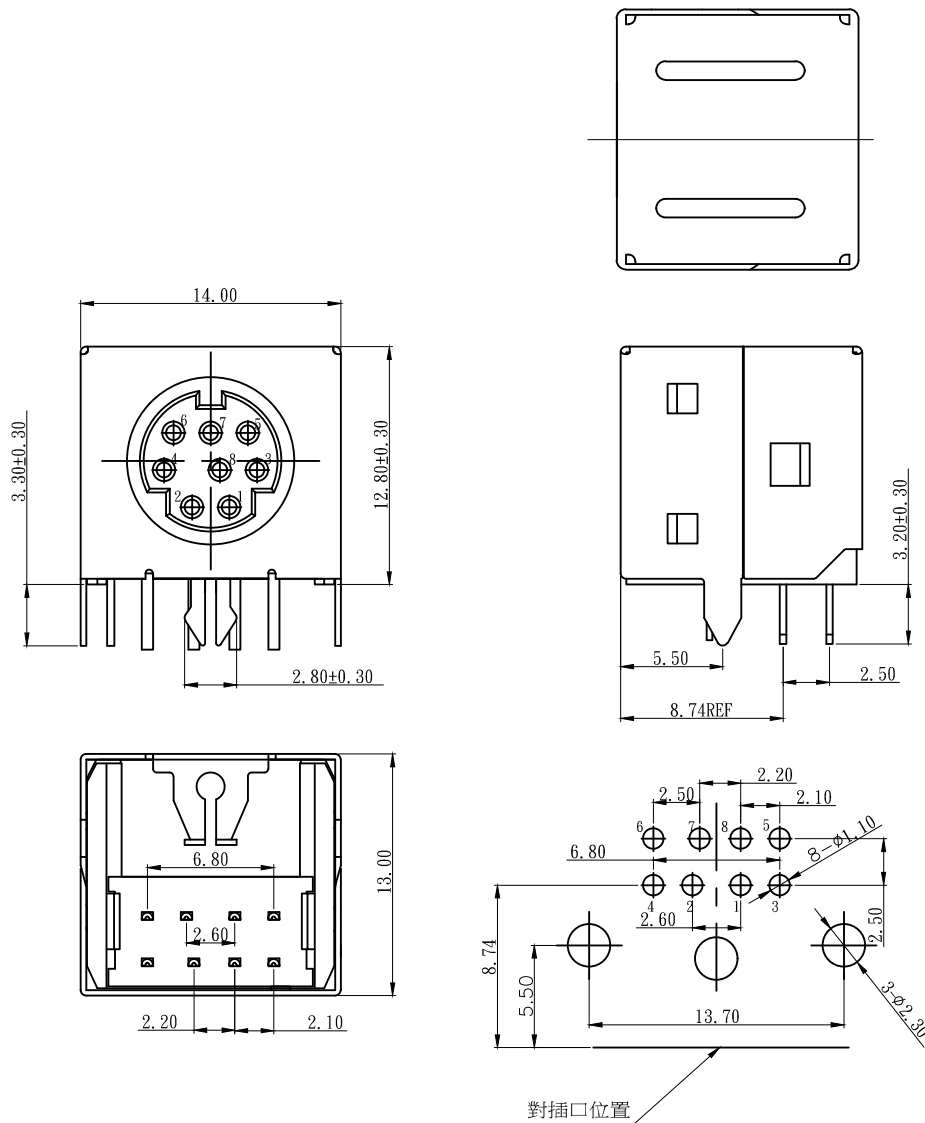

NOTE:
 MATERIAL:
 INSULATOR:PBT+30% G.F. UL 94V-0;
 CONTACT:BRASS
 SHELL:SPCC
 MATING FORCE: 45N MAX.
 WITHDRAWAL FORCE:7N MIN.
 DURABILITY:500 CYCLES MIN.
 CURRENT-MAX[AMPS] 1.0A
 VOLTAGE-MAX[VOLTS] 30V
 WITHSTANDING VOLTAGE 750V AC
 INSULATION RESISTANCE [OHMS] 1000 MEGOHMS MIN
 CONTACTS: GOLD FLASH AND NICKEL PLATED OVER ALL
 SHELL:NICKEL OVER ALL PLATING
 TEMPERATURE RANGE:-55℃~+85℃

RECOMMENDED P. C. B. PATTERN LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDJ-F-08-LF
 SERIES | LEADFREE
 08 WAY
 FULL METAL

DESCRIPTION: MD 8F 90度 DIP直脚鱼叉 有加强筋无切口