
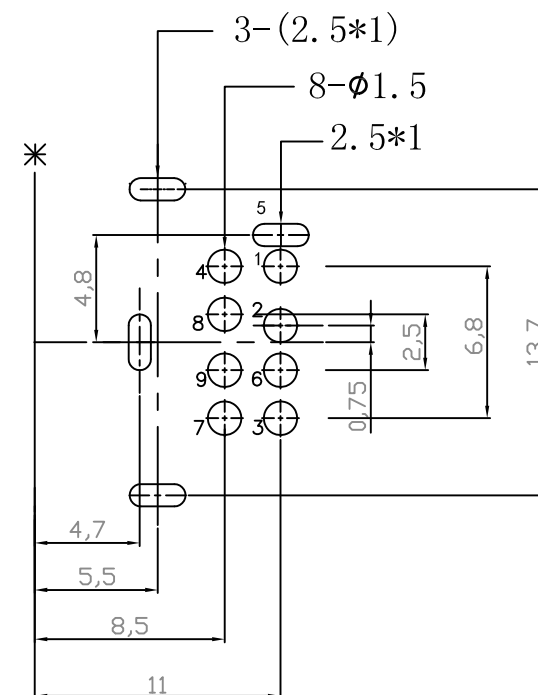
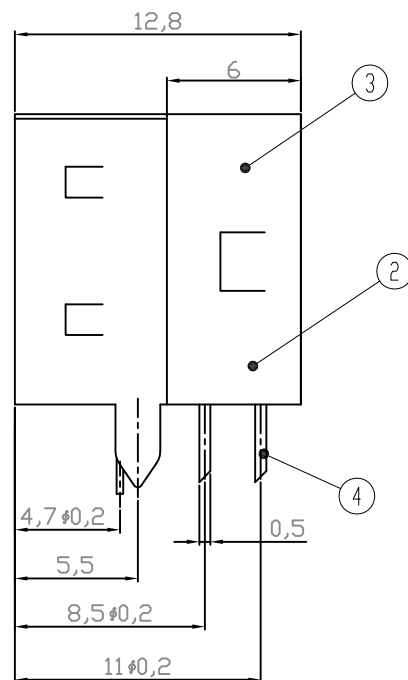


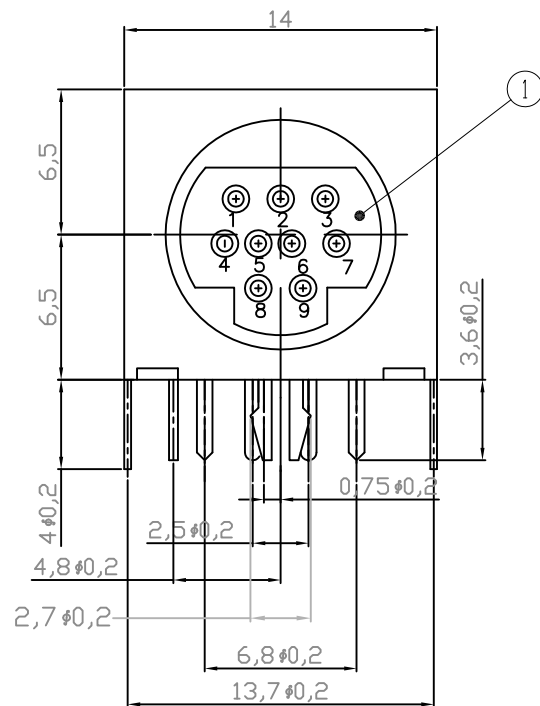

技术说明

1. 额定值: 50V 1.0A;
2. 接触电阻: $\leq 0.03 \Omega$;
3. 绝缘电阻: $\geq 100M \Omega$ (250V);
4. 耐压: 500VAC ;
5. 插拔力: 5-35N;
6. 寿命: 1000 次

5	针	1	磷铜	0.4	Ag
4	针	8	磷铜	0.2	Ag
3	外壳	1	黄铜	0.3	Cu-Sn
2	底盖	1	PBT		
1	塑料座	1	PBT		
序号	名称	数量	材料	材料	电镀

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.25

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MDJ-F-09A-LF

SERIES | LEADFREE
09 WAY A TYPE
FULL METAL

DESCRIPTION: