
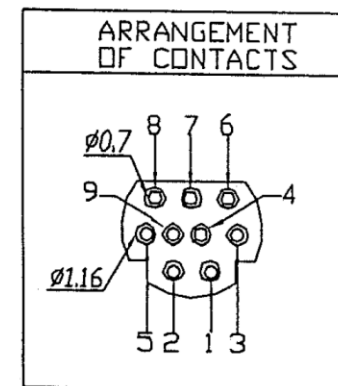
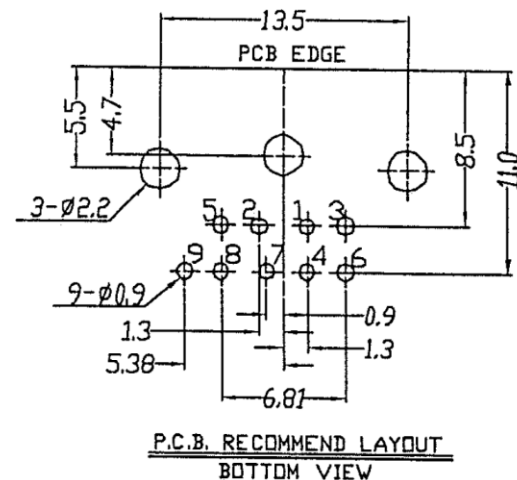
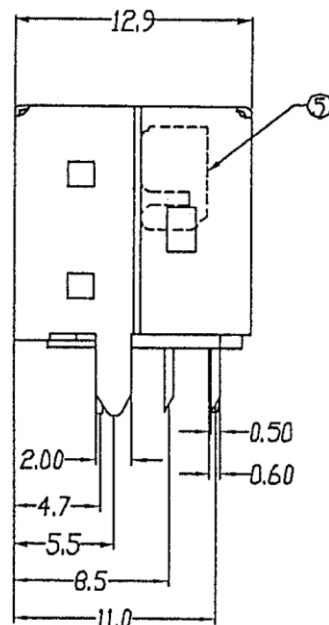


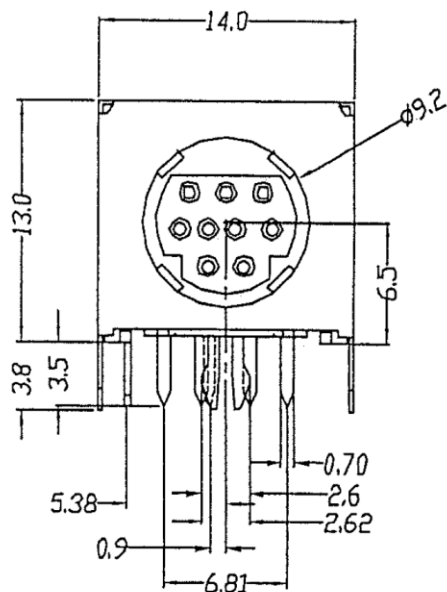


Specification

Contact resistance: 30M Ohm Max
 Insulation resistance: 100M Ohm Min
 Voltage and Current:
 DC 12V 2A Max; AC 100V 1A Max
 Dielectric withstanding: 250V AC
 Durability: 100 Cycles
 Insertion force: 4.0KG Max
 Extraction force: 0.9KG Min

Material

1. Housing: P.B.T. GF black
2. Contact: Phos bronze T-0.2T
3. Shell Brass T-0.3T Tin ptd
4. Bottom cover: P.B.T GF black
5. Particle: P.E. White
6. Contact: Phos.bronze T-0.4

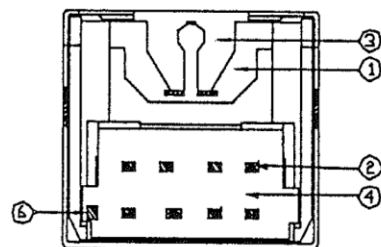

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDJ-FG-09-LF
 SERIES T T LEADFREE
 09WAY
 GOLD
 FULL METAL

DESCRIPTION: