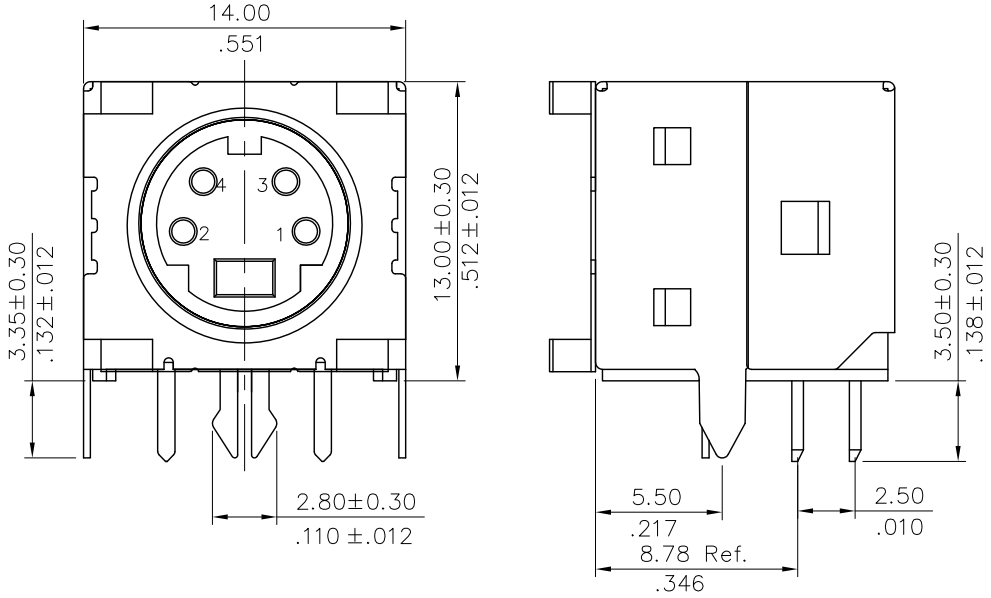

Materials :

* Insulator : Glass filled polyester UL 94V-0
* Contact : Brass
* Shield : Brass with Nickel plated
* Solder tail plating : Tin plated over Nickel Selective Gold flash plated over 1.27μm(50μ") Nickel

Circuits	4	6
Arrangement of Contact		
P.C Board Layout Tolerance .X ±0.10/.004 .XX ±0.05/.002		

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 ANG ±
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

MDJ-FGS4-xx-LF

- SERIES
- GOLD
- FULL METAL
- SPRING
- 03~08WAY
- LEADFREE

DESCRIPTION: FULLY SHELED MINI DIN SOCKET WITH HOOK & GROUNDING