
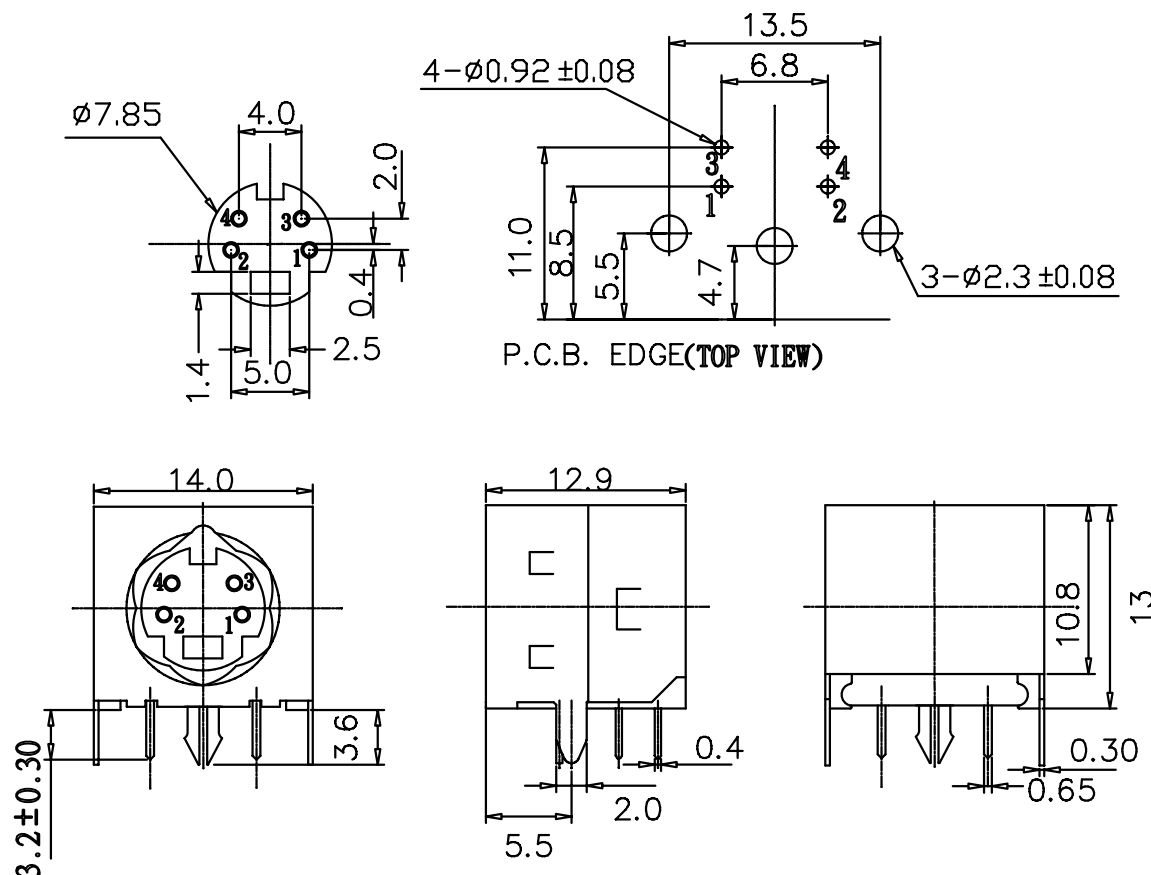


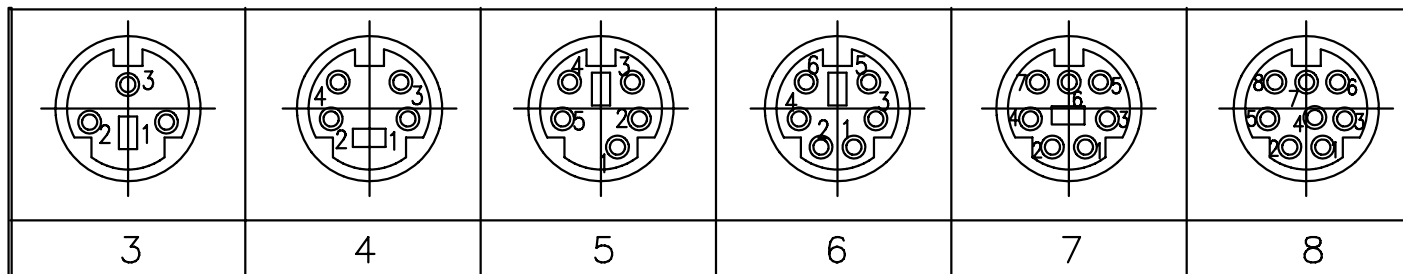

NOTES:

1. MATERIAL:

SHELL :C2680H Brass Strip t=0.3mm(銅)

HOUSING :PBT 30% GLASS

PIN :C5191 t=0.2mm(磷銅)

2. PLATING:

SHELL :銅50 μ "min 錫鉛120 μ "min

PIN :Under Plate 50 μ "min. Nickel All Over

120 μ "min. Tin/Lead in Soldering Area

Selective Gold Plated in Contact Area.

3. SPECIFICATIONS:

Electrical:

Current Rating:100V AC 1A MAX. 12V DC 2A MAX.

Insulation Resistance:500M Ω MIN. at 500V DC

Dielectric Strength:500V AC/1 minute

Contact Resistance:30 m Ω MAX.

Mechanical:

Insertion Force:4.5KG MAX.

Withdrawal Force:0.9KG ~3.0 KG

Contact Retention Force:1.02KG MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
X $\pm$ 0.10
.XX $\pm$ 0.05
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MDJ-FL-xx-LF
SERIES T LEADFREE
03~08 WAY
LOCK
FULL METAL

DESCRIPTION: MINI DIN PCB FULLY SHIELED